




Tehničke karakteristike artikla: LILE0131--

Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--



Kriva prostiranja svetla




Tehnički podaci

Neto visina (mm)	79,00
Neto prečnik (mm)	320,00
Neto težina (kg)	2,45
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40
Način montaže	Downlight Zidna svetiljka
Opis boje	RAL 9005 crno
Materijal	Aluminijum PMMA
Faktor odsjaja (UGR)	19
Nazivni napon AC (V)	220-240
Nazivni napon DC (V)	216 260 240 186
Sistemska efikasnost (lm/W)	120
Snaga (W)	24 18 10
Boja svetla	Neutralno bela Toplo bela
Temperatura boje (K)	4000 3000
Indeks reprodukcije boje	90
Svetlosni flux (lm)	1200 2880 2160
Životni vek	50000
Klasa zaštite	I
IP stepen zaštite	IP20
Klasa energetske efikasnosti	D
IK stepen zaštite	IK06

Tehnički podaci - nastavak

Prečnik (mm)	320
ØxV mm	320x79

Dimenzija: Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

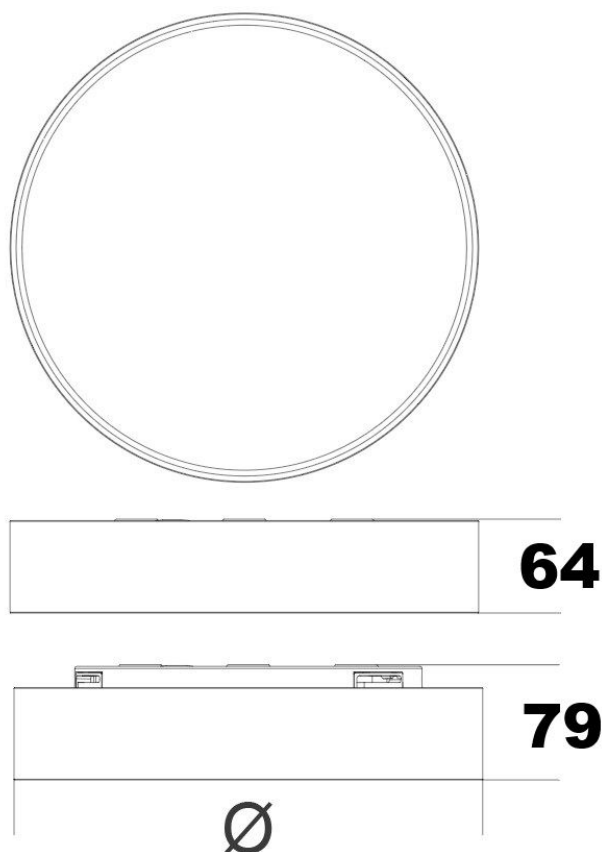

OPIS	Kat. broj
Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--	LILE0131