


Tehničke karakteristike artikla: LIN1122077

Park LED 30W 3600lm 4000K IP65, IK08 asimetrična siva

RAL 7042, Ulična svetiljka



Kriva prostiranja svetla



Tehnički podaci

Neto dužina (mm)	437,00
Neto širina (mm)	165,00
Neto visina (mm)	72,00
Neto težina (kg)	1,00
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
Način montaže	Montažno
Opis boje	sivo
Materijal	Polikarbonat Liveni aluminijum
Ugao emisije (°)	75x105
Upravljačka oprema (napajanje)	LED drajver
Sijalično grlo	LED štampana ploča
Sistemska efikasnost (lm/W)	120
Snaga (W)	30
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	>80
Svetlosni flux (lm)	3600
Životni vek	50.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	I
IP stepen zaštite	IP65
Klasa energetske efikasnosti	D
IK stepen zaštite	IK08
Sijalica uključena	Da
Prenaponska zaštita (kV)	10
Pigtail (mm)	40 - 60
DxŠxV mm	437x165x72
Nazivna struja (A)	220-240

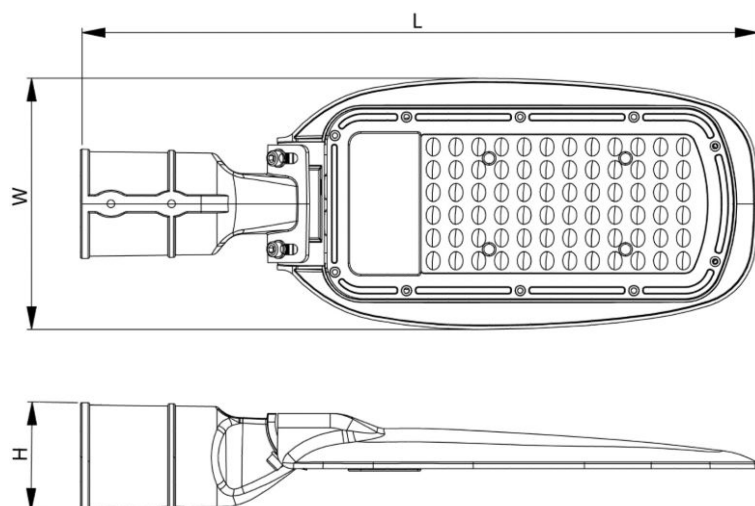
Dimenzija: Park LED 30W 3600lm 4000K IP65, IK08 asimetrična siva

Tabela artikla

OPIS	Kat. broj
Park LED 30W 3600lm 4000K IP65, IK08 asimetrična siva RAL 7042, Ulična svetiljka	LIN1122077
Potreban pribor	
Priključna kutija 1 IN / 1 OUT 16A 450V 0,5-1,5mm IP67 Dodatak za montažu	LID16098
	LI228725
IP68 razvodna kutija, 3-žilna za 3-žilne kablove prečnika 6-12mm, prihvat stezaljki 3x4mm ² , nazivni napon 230V AC, maksimalni napon 400V AC, maks. 17,5A	LI228730