


Tehničke karakteristike artikla: LITP0054--


# LANO BL LED 33W 840 4300lm 850mA M625

## UGR<19 mikroprizma

LED Panel beli, može se kombinovati sa LED driverom LITP0029 (on/off) ili LITP0030-A (DALI, Push Dim)

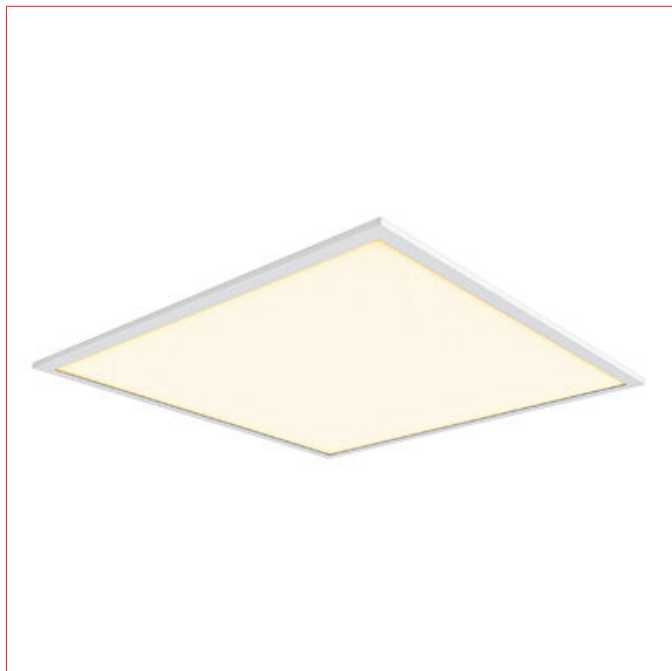

### Kriva prostiranja svetla




### Tehnički podaci

|                  |        |
|------------------|--------|
| Neto dužina (mm) | 620,00 |
| Neto širina (mm) | 620,00 |
| Neto visina (mm) | 30,00  |
| Neto težina (kg) | 2,05   |

## Tehnički podaci - nastavak

|                                        |                                                                         |
|----------------------------------------|-------------------------------------------------------------------------|
| Min. temperatura okoline (°C)          | -20                                                                     |
| Maks. temperatura okoline (°C)         | 40                                                                      |
| Vrsta svetiljke (prema načinu primene) | LED panel                                                               |
| Način montaže                          | Svetiljka za spušten plafon<br>Plafonska ugradna<br>Plafonska nadgradna |
| Opis boje                              | bela                                                                    |
| Materijal                              | metal                                                                   |
| Faktor odsjaja (UGR)                   | < 19                                                                    |
| Nazivna struja mA (mA)                 | 850                                                                     |
| Sistemska efikasnost (lm/W)            | 135lm/w                                                                 |
| Snaga (W)                              | 33                                                                      |
| Boja svetla                            | Neutralno bela                                                          |
| Temperatura boje (K)                   | 4000                                                                    |
| Indeks reprodukcije boje               | ≥80                                                                     |
| Stabilnost boje MacAdam (sdcm)         | ≤3                                                                      |
| Svetlosni flux (lm)                    | 4300                                                                    |
| Životni vek                            | 50.000h / L70 / B50                                                     |
| Dimabilno                              | U zavisnosti od driver-a<br>Da                                          |
| Klasa zaštite                          | III                                                                     |
| IP stepen zaštite                      | IP20, IP40 optički delovi                                               |
| Sijalica uključena                     | Da                                                                      |
| DxŠxV mm                               | 620x620x30                                                              |

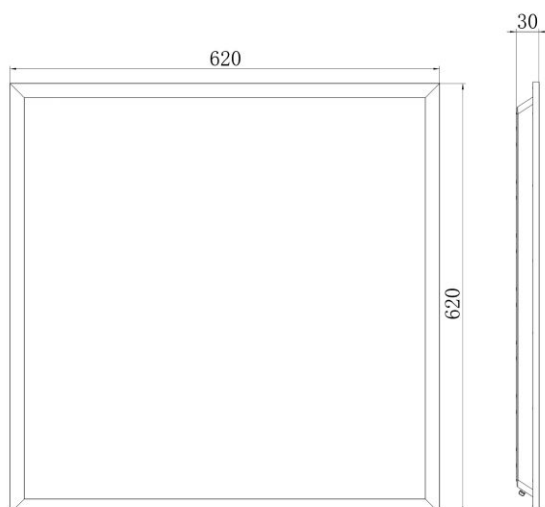**Dimenzija: LANO BL LED 33W 840 4300lm 850mA M625 UGR<19  
mikroprizma****Tabela artikla**

| OPIS                                                                                                  | Kat. broj  |
|-------------------------------------------------------------------------------------------------------|------------|
| LANO BL LED 33W 840 4300lm 850mA M625 UGR<19 mikroprizma                                              | LITP0054   |
| LED Panel beli, može se kombinovati sa LED driverom LITP0029 (on/off) ili LITP0030-A (DALI, Push Dim) |            |
| <b>Dodatni pribor</b>                                                                                 |            |
| LED Driver 33W 850mA on/off, za seriju Lano 4 LED                                                     | LITP0029   |
| Bez treperenja                                                                                        |            |
| LED DALI-2 Driver 33W 850mA za seriju Lano 4 LED                                                      | LITP0030-A |
| DALI i Push to Dim                                                                                    |            |
| 3-polna spojna kutija, IP20, Quick Fix                                                                | LID15379   |
| EM LED modul 3h za LED Panel Lano 4 30-40W                                                            | LITP0032   |
| Driver se kupuje posebno                                                                              |            |