


Tehničke karakteristike artikla: LIUS0004-A

Svet PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20 dim.crna

Ugradni plafonski reflektor sa podesivom snagom (5W/8W) i podesivom temperaturom boje (2700K/3000K/4000K), CRI > 90



Kriva prostiranja svetla



PUNTO LED Recessed Downlight

The PUNTO LED recessed downlight in black combines flexibility with excellent light quality. The integrated power selector allows the output to be adjusted between 5 W and 8 W, making it suitable for a wide range of lighting applications. The selectable color temperature offers a choice of 2700 K (Extra Warm White), 3000 K (Warm White), or 4000 K (Neutral White), allowing the lighting atmosphere to be tailored to the environment. With a high CRI > 90, colors are rendered naturally and accurately. The precise 36° beam angle provides focused and comfortable illumination, while Triac dimming enables smooth brightness adjustment to create the desired ambiance. The luminaire operates directly on 230 V mains voltage. The fitting features a practical protection rating design: IP65 from below for protection against dust and water ingress in the visible area, and IP20 from above for installation within the ceiling. For advanced lighting control, the LIUS0042 8 W LED DALI Driver for the PUNTO series is available as an optional accessory. It supports DALI 2, Push Dim, smooth dimming, and AC/DC operation.



Tehnički podaci

Neto visina (mm)	30,00
Neto prečnik (mm)	80,00
Neto težina (kg)	0,24
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svetiljke (prema načinu primene)	Plafonska svetiljka ugradna
Način montaže	Panelna montaža
Opis boje	crno
Materijal	Aluminijum
Ugao emisije (°)	36
Upravljačka oprema (napajanje)	LED drajver AC
Nazivni napon AC (V)	220-240
Nazivna struja mA (mA)	185
Sijalično grlo	LED štampana ploča
Sistemske performanse (W)	90
Snaga (W)	5; 8
Boja svetla	Toplo bela
Temperatura boje (K)	3000K 2700K 4000K
Indeks reprodukcije boje	≥90
Stabilnost boje MacAdam (sdcm)	<6
Svetlosni flux (lm)	5W =450; 8W=720
Životni vek	50.000h
Dimabilno	Kontrola faze (L) Fazni presek (C) Da
Klasa zaštite	II
IP stepen zaštite	IP65 IP20
Klasa energetske efikasnosti	E
Ugradna dubina (mm)	35 (Treiber: 55)
Sijalica uključena	Da
Prečnik (mm)	80
ØxV mm	80x30
Otvor (mm)	Ø 68
OTVOR mm	Ø 68
Broj svetiljki po osiguraču B10	111
Broj svetiljki po osiguraču B16	178
Broj svetiljki po osiguraču C10	111

Tehnički podaci - nastavak

Broj svetiljki po osiguraču C16

178

**Dimenzija: Svet PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20
dim.crna**

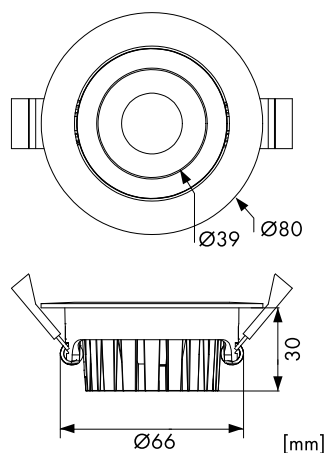


Tabela artikla

OPIS	Kat. broj
Svet PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20 dim.crna	LIUS0004-A
Ugradni plafonski reflektor sa podesivom snagom (5W/8W) i podesivom temperaturom boje (2700K/3000K/4000K), CRI > 90	
Dodatni pribor	
LED DALI driver 8W, for PUNTO series	LIUS0042
DALI 2, Push Dim, bešavno zatamnj enje, AC/DC	
Dimer LED 4-350VA RLC, za taster	EHLED350K
s priključnim vijčanim stezaljkama; nazivni napon: 230V AC; potrošnja: 2VA; memorijska funkcija; dimenzije: 46x46x19mm (ŠxVxD)	
Dimer LED 4-350VA RLC, za taster	EHLED350D
s priključnim vodičima; nazivni napon: 230V AC; potrošnja: 2VA; memorijska funkcija; dimenzije: 45x45x12mm (ŠxVxD)	
LED dimer 6-100VA, umetak	EV103020
Kompletirati sa pokrovom (odabrati jedan od ponuđenih pokrova): EV102013--, EV112013--, EV122013--, EV102313--, EV112313--, EV122313--	
Okvir 1-struki, beli	EV105001
VISIO S 50 (50x50), VISIO 50	
Taster za dimer, beli	EV102013
VISIO S 50 (50x50), VISIO 50	
Jednostruka okvir, dizajn CUBIC, bela	EV105301
VISIO S 55 (55x55)	
Dimer poklopac, bela	EV102313
Kompletirati sa umetkom EV103020--, VISIO S 55 (55x55), CUBIC	