


Tehničke karakteristike artikla: LIVB0023--

DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66

LED vododihtujuća svetiljka sa sivim GFRP kućištem, opalni difuzor i inox kopče, dodatno Dip-Switch funkcija: 25W-4100lm/32W-5200lm/38W-6200lm/44W-7200lm



Kriva prostiranja svetla



Detalji artikla

Devo PRO II for outdoor use; climatic spigot (membrane to compensate for temperature differences); silicone seal; UV-resistant



Tehnički podaci

Neto dužina (mm)	1.454,00
------------------	----------


Tehnički podaci - nastavak

Neto širina (mm)	102,00
Neto visina (mm)	90,00
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	35
Vrsta svetiljke (prema načinu primene)	Zidne nadgradne svetiljke Plafonska svetiljka nadgradna Svetiljka privezak
Način montaže	Viseća Plafonska nadgradna Montaža na zid
Opis boje	svetlo sivo
Materijal	Glass fibre reinforced polyester
Pokrov	PMMA opal
Upravljačka oprema (napajanje)	LED drajver AC
Nazivni napon AC (V)	230
Sijalično grlo	LED Platine
Sistemska efikasnost (lm/W)	139
Snaga (W)	25;32;38;44
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Svetlosni flux (lm)	4100;5200;6200;7200
Životni vek	50.000h / L80 / B10
Dimabilno	Ne
Klasa zaštite	I
IP stepen zaštite	IP66
IK stepen zaštite	IK03
Sijalica uključena	Da
Oznaka zaštite od požara	D
DxŠxV mm	1454x102x90
Broj svetiljki po osiguraču B10	11
Broj svetiljki po osiguraču B16	16
Broj svetiljki po osiguraču C10	19
Broj svetiljki po osiguraču C16	27

Lista fajlova: DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66

DIP-Switch 1	DIP-Switch 2	Leistung [W]	Strom [mA]
OFF	OFF	25	200
OFF	ON	32	250
ON	OFF	38	300
ON	ON	44	350

Dimensions [mm]

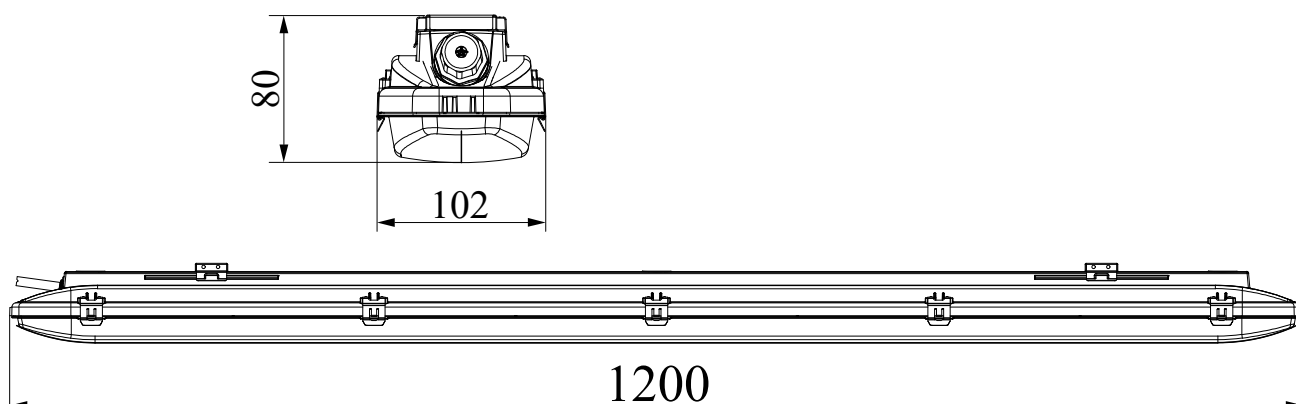

OPIS	Kat. broj
DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66	
LED vododihujuća svetiljka sa sivim GFRP kućištem, opalni difuzor i inox kopče, dodatno Dip-Switch funkcija: 25W-4100lm/ 32W-5200lm/38W-6200lm/44W-7200lm	LIVB0023