

Tehničke karakteristike artikla: NL93000004

Panik svet. otpo. na eksploziju EXIT zone2/22 LED 230 VAC/DC

Providan poklopac bez piktograma, za CPS i LPS, zidnu nadgradnu montažu, IP66




Tehnički podaci

Neto dužina (mm)	356,00
Neto visina (mm)	175,00
Neto dubina (mm)	76,00
Neto težina (kg)	2,00
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	Standard
Verzija	EX sigurnosna rasveta
Dizajn	EXIT
Opis boje	sivo
Izvor svetla	LED (3W)
Lumen	106
Opseg napona (V)	110-277V AC; 110-250V DC
IP stepen zaštite	IP66
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

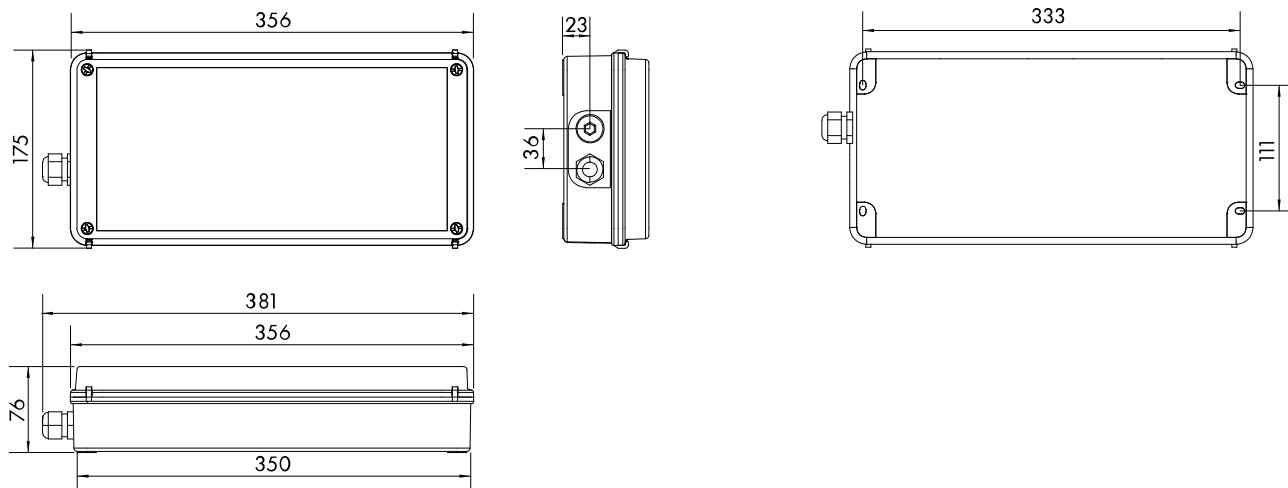

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

Tabela artikla

OPIS	Kat. broj
Panik svet. otpo. na eksploziju EXIT zone2/22 LED 230 VAC/DC	NL93000004
Providan poklopac bez piktograma, za CPS i LPS, zidnu nadgradnu montažu, IP66	
Dodatni pribor	
Upravljački modul opšteg osvetljenja za CPS MIX-mod; 4-200VA	NLMU05
Kutija IP65 sa pločom za mont. + MU05 za svetiljke do 200VA	NLMU05BOX
176x125x82 mm (LxHxD)	