

Tehničke karakteristike artikla: NLAIEE09EL

Svetiljka u slučaju nužde, Al, LED, nerđajući čelik, plaf.

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm




Tehnički podaci

Neto dužina (mm)	167,00
Neto širina (mm)	92,00
Neto visina (mm)	159,00
Neto težina (kg)	0,80
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Pljosnate svjetiljke
Dizajn	Al
Opis boje	Izgled nerđajućeg čelika
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	15
Izvor svetla	LED (1.5W)
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Plafonska ugradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

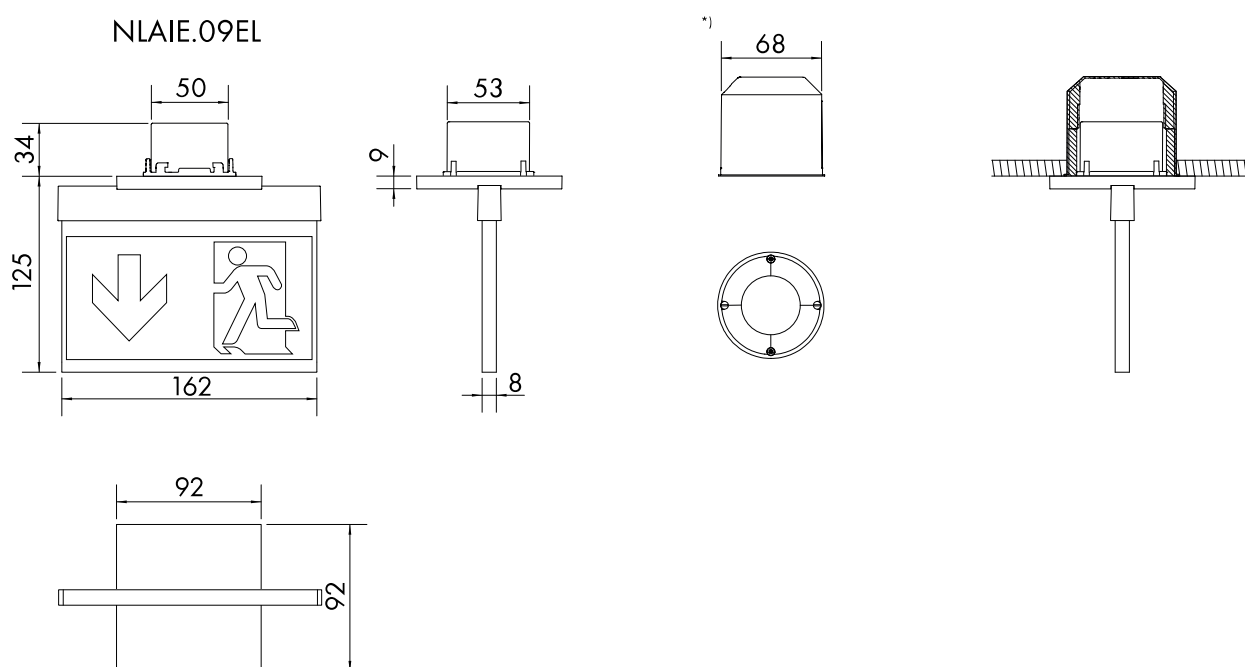

OPIS	Kat. broj
Svetiljka u slučaju nužde, Al, LED, nerđajući čelik, plaf.	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm	NLAIEE09EL