


Tehničke karakteristike artikla: NLAMDPE09E

Svetiljka u slučaju nužde, AM, LED, nerđajući čelik, viseća

with supervision - centrally switchable, Viewing distance: 22m, LED, 230V AC/DC, Pendant: standard length 1500mm (shortenable)

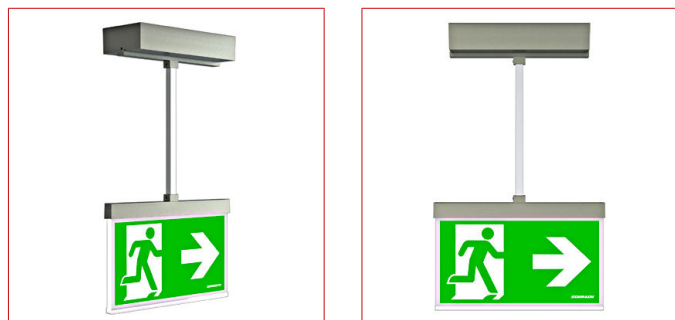

Tehnički podaci

Neto dužina (mm)	241,00
Neto širina (mm)	80,00
Neto visina (mm)	184,00
Neto težina (kg)	1,15
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Pljosnate svjetiljke
Dizajn	AM
Opis boje	Izgled nerđajućeg čelika
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	22
Izvor svetla	LED (2W)
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	1,10
Power max. (W)	3,50
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Visilica nadgradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

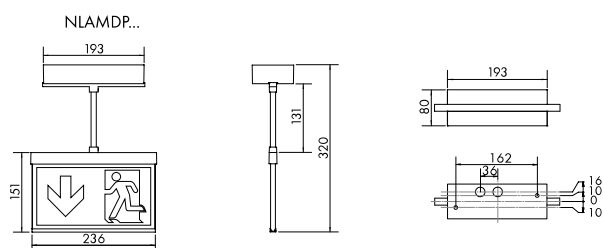


Tabela artikla

OPIS	Kat. broj
Svetiljka u slučaju nužde, AM, LED, nerđajući čelik, viseća with supervision - centrally switchable, Viewing distance: 22m, LED, 230V AC/DC, Pendant: standard length 1500mm (shortenable)	NLAMDP09E
Dodatni pribor	
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma „zaštita od požara“ 22m (2x4 kom.) Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Surface adapter for emergency luminaire Dizajn AM/AX stainless steel look, for lateral cable entry	NLAMAXAPAE