

Tehničke karakteristike artikla: NLAMDTA09E

AM Duo panika LED, antracit, plafonska viseća

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto dužina (mm)	241,00
Neto širina (mm)	80,00
Neto visina (mm)	184,00
Neto težina (kg)	1,15
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Pljosnate svetiljke
Dizajn	AM
Opis boje	RAL 7016 (antracit)

Tehnički podaci - nastavak

Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	20
Izvor svetla	LED (2W) ERT-LED (1W)
Lumen	140
Opseg napona (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,10
Power non-maintained mode (W)	1,10
Power max. (W)	4,20
IP stepen zaštite	IP40
Otpornost na udar	$\geq IK03$
Način montaže	Visilica nadgradna (uže)
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

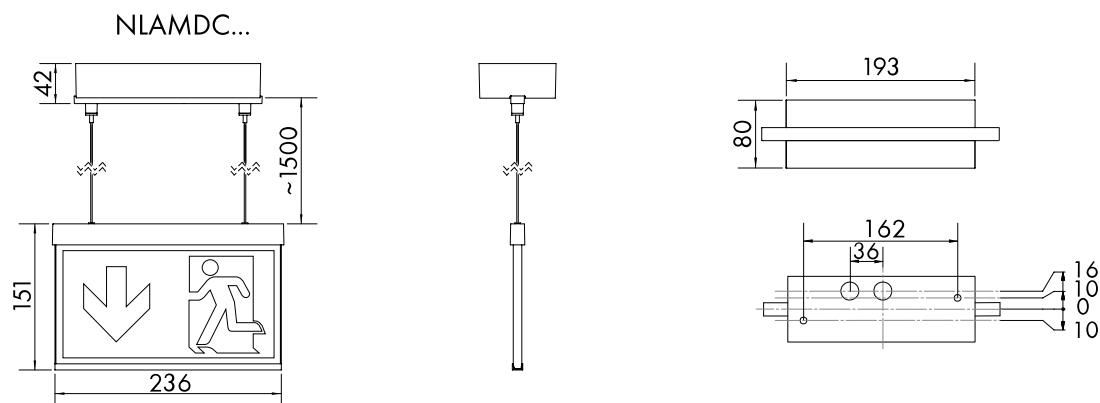

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,86	8,79	6,13	3,19	1,41
2,50	2,85	9,62	6,47	3,70	1,56
3,00	3,12	9,84	5,76	4,11	1,61
3,50	3,32	10,35	6,26	4,41	1,48
4,00	3,46	8,75	6,65	4,55	1,22

Tabela artikla

OPIS	Kat. broj
AM Duo panika LED, antracit, plafonska viseća Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm	NLAMDTA09E
Dodatni pribor	
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma „zaštita od požara“ 22m (2x4 kom.) Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Surface adapter for emergency luminaire Dizajn AM/AX anthracite, for lateral cable entry	NLAMAXAPAA