

Tehničke karakteristike artikla: NLASMU008B

# Emerg.lum.ASM 4x0,5W HighPowerLED 8h 230V AC WirelessConnect

Universal mounting, with LiFePO<sub>4</sub> battery, exit sign luminaire, with Bluetooth communication.



## Tehnički podaci


|                                        |                                                                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto dužina (mm)                       | 277,00                                                                                                                          |
| Neto visina (mm)                       | 184,00                                                                                                                          |
| Neto dubina (mm)                       | 46,00                                                                                                                           |
| Neto težina (kg)                       | 0,80                                                                                                                            |
| Vrsta svetiljke (prema načinu primene) | anti-panik svetiljka                                                                                                            |
| VB-CPS                                 | Sa sopstvenom baterijom                                                                                                         |
| Funkcija                               | Wireless veza                                                                                                                   |
| Verzija                                | Metalna svetiljka<br>Pljosnate svjetiljke                                                                                       |
| Dizajn                                 | ASM                                                                                                                             |
| Opis boje                              | srebrno                                                                                                                         |
| Pictogram                              | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje prepoznavanja/domet (m)       | 22                                                                                                                              |

## Tehnički podaci - nastavak

|                                |                                                      |
|--------------------------------|------------------------------------------------------|
| Vreme autonomije (h)           | 8                                                    |
| Izvor svetla                   | LED (2W)                                             |
| Opseg napona (V)               | 230V AC 50Hz ±20%                                    |
| Power maintained mode (W)      | 3,90                                                 |
| Power non-maintained mode (W)  | 1,50                                                 |
| Power max. (W)                 | 5,30                                                 |
| Baterije (V/Ah)                | 3,2/3,0 LiFePO4                                      |
| IP stepen zaštite              | IP40                                                 |
| Otpornost na udar              | IK03                                                 |
| Način montaže                  | Univerzalna<br>Plafonska nadgradna<br>Montaža na zid |
| Min. temperatura okoline (°C)  | -5                                                   |
| Maks. temperatura okoline (°C) | 40                                                   |
| AA Klasa E 8101                | AA4                                                  |
| Proizvođač                     | Schrack                                              |

## Abmessungen (mm)

NLASMU...

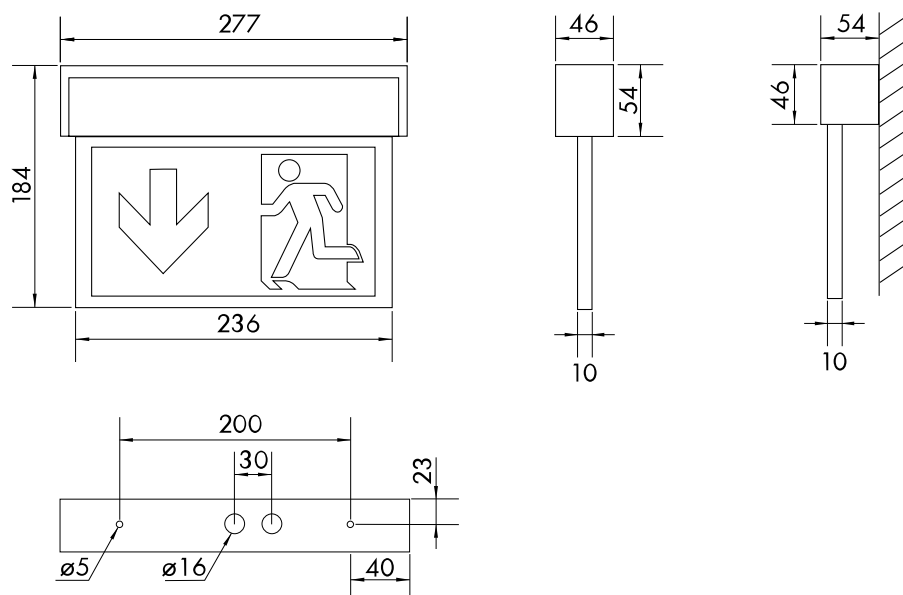

## Tabela artikla

| OPIS                                                                                                                                                         | Kat. broj  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emerg.lum.ASM 4x0,5W HighPowerLED 8h 230V AC WirelessConnect<br>Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication. | NLASMU008B |
| <b>Dodatni pribor</b>                                                                                                                                        |            |
| Ugradni okvir za centralnu baterisku svetiljku Dizajn KM<br>Required ceiling cut out: 275 x 54 mm                                                            | NLKME      |
| Zidni nosač beli za svetiljke dizajna KM/KS                                                                                                                  | NLAWKSU    |
| Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW<br>LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah                     | NLAKKU3230 |
| Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena<br>Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery                 | NL2DWKMKS  |
| Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM                                                                                                        | NLBALL1    |
| Cevni nosač hromirani, 2m, montaža na plafon                                                                                                                 | NLDSA000   |
| Sajla za ovesanje 2000mm, 1 kom                                                                                                                              | NLCORD2    |
| Sajla za ovesanje 4000mm, 1 kom                                                                                                                              | NLCORD4    |