


Tehničke karakteristike artikla: NLASMU403S

Emergency luminaire ASM Autotest LED 3h 230V AC

Universal mounting, with 4x0,5W High Power LED, exit sign luminaire, with LiFePO4 battery, 1h/3h/8h adjustable, viewing distance: 22m

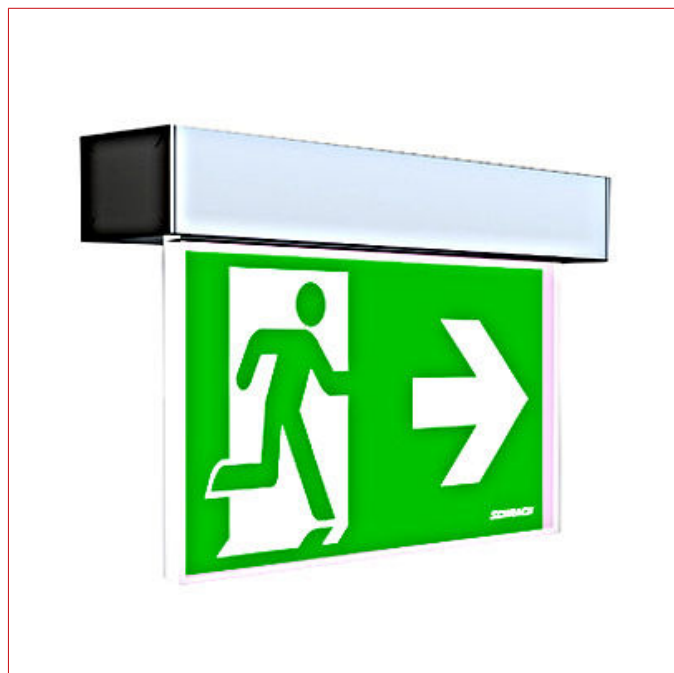

Tehnički podaci

Neto dužina (mm)	277,00
Neto visina (mm)	184,00
Neto dubina (mm)	46,00
Neto težina (kg)	0,80
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Metalna svetiljka Pljosnate svjetiljke
Dizajn	ASM
Opis boje	srebrno
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje prepoznavanja/domet (m)	22
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterije (V/Ah)	3.2/1.6 LiFePO4
IP stepen zaštite	IP40
Otpornost na udar	IK03
Način montaže	Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLASMU...

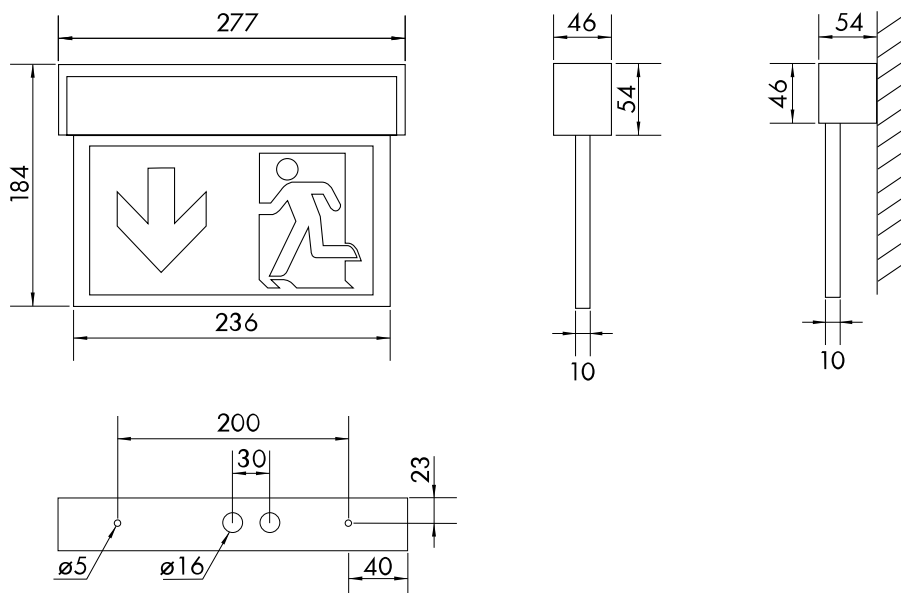


Tabela artikla

OPIS	Kat. broj
Emergency luminaire ASM Autotest LED 3h 230V AC	
Universal mounting, with 4x0,5W High Power LED, exit sign luminaire, with LiFePO4 battery, 1h/3h/8h adjustable, viewing distance: 22m	NLASMU403S
Dodatni pribor	
Set 2 accus LiFePO4 3,2V 1,6Ah f. luminaires. w. LEO or LPK	
LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321C
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM	
viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM	
viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM	
viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM	
viewing distance: 22m	NLAMPIKTRU
Set piktograma „zaštita od požara“ 22m (2x4 kom.)	
Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.)	
pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4