

Tehničke karakteristike artikla: NLDHE023SC

Sig.sv.sa bat. DHE Autotest ERT-LED 1h, 3h, 8h 230VAC ugradna

1h/3h/8h adjustable








Tehnički podaci

Neto dužina (mm)	270,00
Neto širina (mm)	83,00
Neto visina (mm)	110,00
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Metalna svetiljka
Dizajn	DL
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (3W)
Lumen	1h: 300;3h: 300;8h: 150
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	9,6/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLDL...

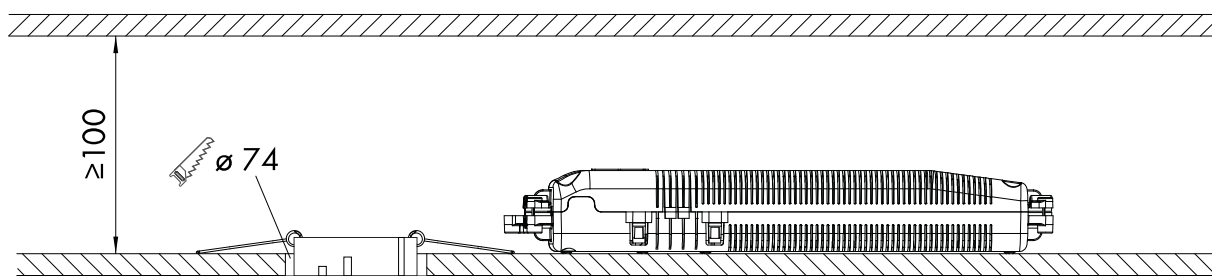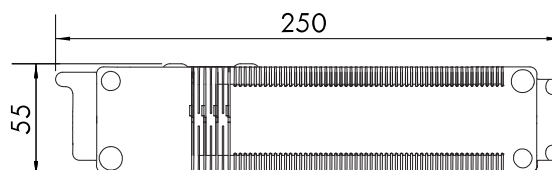

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	3,93	10,98	11,17	10,99	3,76
2,50	3,57	11,21	11,21	11,10	3,44
3,00	2,61	11,10	11,01	10,93	2,52
3,50	1,56	10,11	10,06	9,89	1,00
4,00	0,00	7,83	8,35	8,24	0,00

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	2,00	7,91	7,85	7,79	1,93
2,50	1,06	7,07	7,05	6,94	0,62
3,00	0,00	5,14	5,41	5,13	0,00
3,50	0,00	2,41	2,83	2,79	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Tabela artikla

OPIS	Kat. broj
Sig.sv.sa bat. DHE Autotest ERT-LED 1h,3h,8h 230VAC ugradna 1h/3h/8h adjustable	NLDHE023SC
Dodatni pribor	
Baterija 9,6V 2,0Ah sa ERT-LED, 1h,3h,8h Suitable for LPU module	NLAKKU9620
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3