

Tehničke karakteristike artikla: NLDLE023WL

Sig. svet. DLE 1x1W ERT-LED 3h 230VAC

Wireless bela ugradna

Recessed mounting








Tehnički podaci

Neto dužina (mm)	83,00
Neto širina (mm)	83,00
Neto visina (mm)	18,00
Neto težina (kg)	0,80
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Metalna svetiljka
Dizajn	DL
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (1W)
Lumen	100
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
AA Klasa E 8101	AA4

Dimensions (mm)

NLDL...

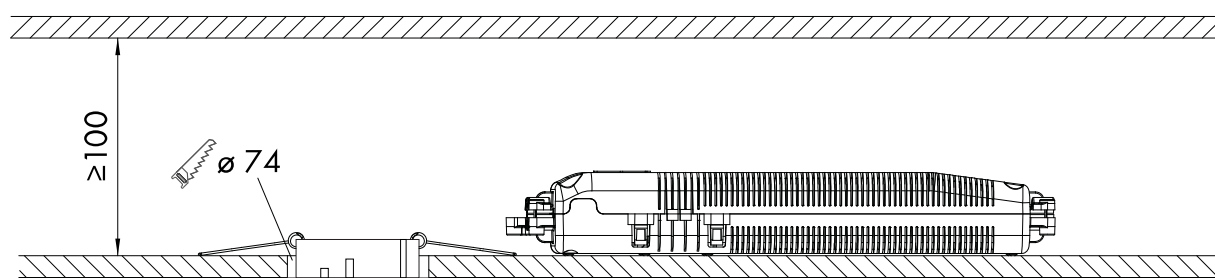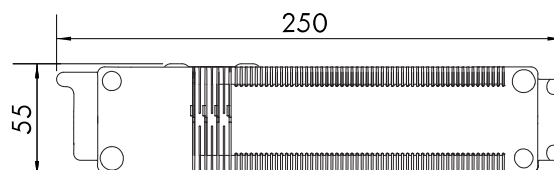

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,00	4,76	6,71	8,61	3,61
2,50	2,10	5,42	7,63	9,87	4,00
3,00	2,10	5,89	8,27	10,96	3,84
3,50	0,74	5,81	8,07	10,37	0,87
4,00	0,00	4,31	7,49	7,84	0,00

Tabela artikla

OPIS	Kat. broj
Sig. svet. DLE 1x1W ERT-LED 3h 230VAC Wireless bela ugradna Recessed mounting	NLDLE023WL
Dodatni pribor	
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod. LPU or LEM module	NLAKKU4820
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3