

Tehničke karakteristike artikla: NLDLE029EL

Protiv - panična svetiljka DLE 3x1W ERT-LED

ugradna montaža

with supervision - centrally switchable








Tehnički podaci

Neto dužina (mm)	270,00
Neto širina (mm)	80,00
Neto visina (mm)	18,00
Neto težina (kg)	0,90
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	DL
Opis boje	bela
Izvor svetla	ERT-LED (3W)
Lumen	300
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLDL...

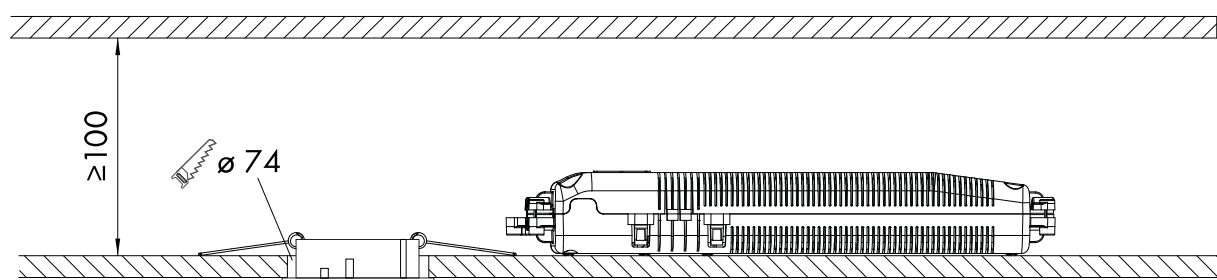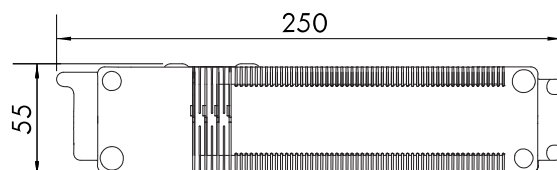

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,93	10,98	11,17	10,99	3,76
2,50	3,57	11,21	11,21	11,10	3,44
3,00	2,61	11,10	11,01	10,93	2,52
3,50	1,56	10,11	10,06	9,89	1,00
4,00	0,00	7,83	8,35	8,24	0,00

Tabela artikla

OPIS	Kat. broj
Protiv - panična svetiljka DLE 3x1W ERT-LED ugradna montaža with supervision - centrally switchable	NLDLE029EL
Dodatni pribor	
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3