


Tehničke karakteristike artikla: NLDOE0235C

Sigurnosna svetilj. DO Autotest 1W ERT-LED

3h 230VAC ugradna

140lm

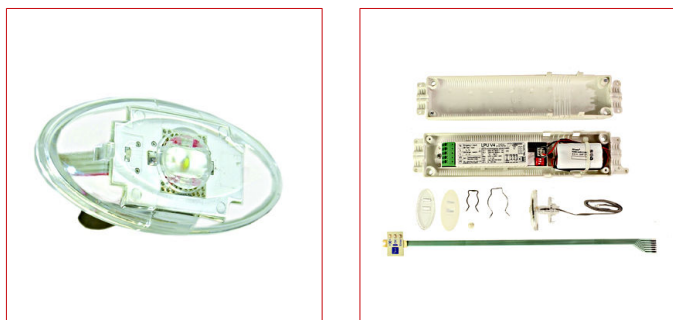

Tehnički podaci


Neto dužina (mm)	53,00
Neto širina (mm)	26,00
Neto visina (mm)	30,00
Neto težina (kg)	0,40
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	DO
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	providno
Izvor svetla	ERT-LED (1W)
Lumen	140
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	1,60
Power non-maintained mode (W)	0,35
Power max. (W)	3
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Otpornost na udar	≥ IK03
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLDOE...

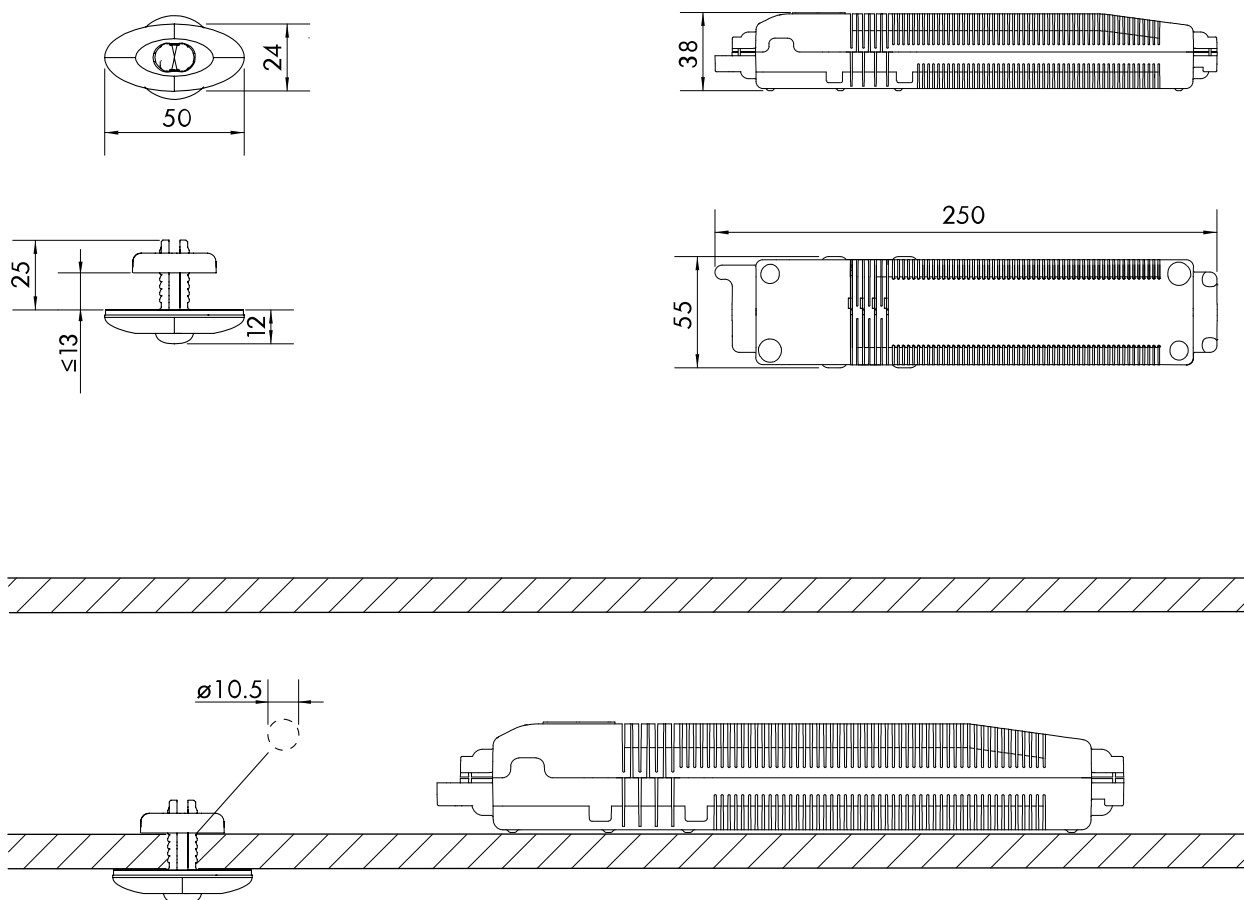

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 1h/3h**

					
2,00	1,54	3,73	7,11	10,71	4,69
2,50	1,68	4,16	8,18	12,46	5,31
3,00	1,74	4,49	8,99	13,91	5,58
3,50	1,71	4,74	9,38	15,11	5,32
4,00	1,60	4,89	9,00	15,81	4,27
5,00	0,86	4,84	7,15	14,82	1,80

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetilj. DO Autotest 1W ERT-LED 3h 230VAC ugradna 140lm	NLDOE023SC
Dodatni pribor	
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod. LPU or LEM module	NLAKKU4820