

Tehničke karakteristike artikla: NLDOE029EL

Protiv - panična svetiljka DO 1x1W ERT-LED

ugradna montaža

with supervision - centrally switchable, 140lm



Tehnički podaci

Neto dužina (mm)	53,00
Neto širina (mm)	26,00
Neto visina (mm)	30,00
Neto težina (kg)	0,40
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Plastične svetiljke
Dizajn	DO
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	providno
Izvor svetla	ERT-LED (1W)
Lumen	140
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,80
Power non-maintained mode (W)	1,10
Power max. (W)	2,80
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4


Tehnički podaci - nastavak

Proizvođač

Schrack

Dimensions (mm)

NLDOE...

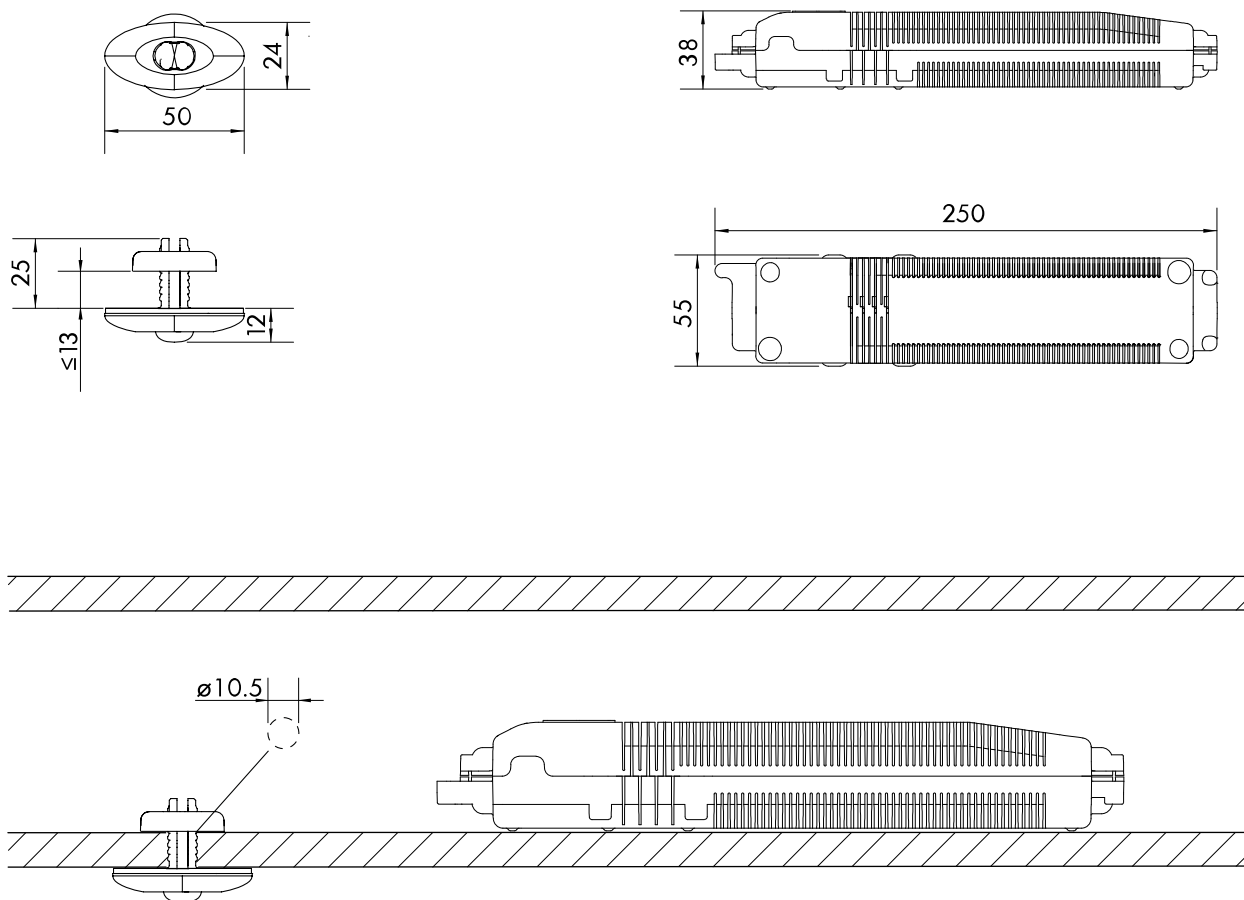

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,54	3,73	7,11	10,71	4,69
2,50	1,68	4,16	8,18	12,46	5,31
3,00	1,74	4,49	8,99	13,91	5,58
3,50	1,71	4,74	9,38	15,11	5,32
4,00	1,60	4,89	9,00	15,81	4,27
5,00	0,86	4,84	7,15	14,82	1,80

OPIS

Kat. broj

Protiv - panična svetiljka DO 1x1W ERT-LED ugradna montaža
with supervision - centrally switchable, 140lm

NLDOE029EL