

Tehničke karakteristike artikla: NLEERF023S

Panik svetiljka EE 1x1W ERT-LED 3h 230V AC Self C. Hallway


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, 1h/3h adjustable



Tehnički podaci

Neto visina (mm)	23,00
Neto prečnik (mm)	88,00
Neto težina (kg)	0,35
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Metalna svetiljka
Dizajn	EE
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4

Dimensions (mm)

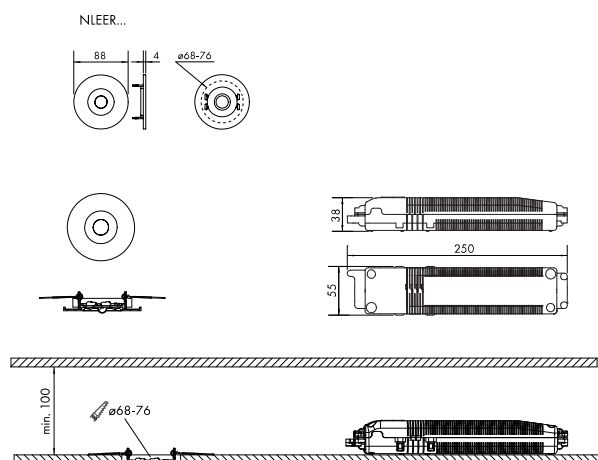

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h-3h autonomy time

Montagehöhe [m]					
2,00	6,16	15,89	12,84	4,92	1,80
2,50	6,19	17,44	13,32	5,08	1,75
3,00	5,41	18,17	12,00	5,13	1,60
3,50	4,48	18,19	10,53	5,05	1,34
4,00	3,13	16,75	8,72	4,81	1,00

Tabela artikla

OPIS	Kat. broj
Panik svetiljka EE 1x1W ERT-LED 3h 230V AC Self C. Hallway White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, 1h/3h adjustable	NLEERF023S
Dodatni pribor	
Pokrov za EE panik svetiljke, kvadratni, beli komplet sa 2 opruge	NLEEQWS
Pokrov za EE panik svetiljke, kvadratni, antracit komplet sa 2 opruge	NLEEQAZ
Pokrov za EE panik svetiljke, okrugli, antracit komplet sa 2 opruge	NLEERAZ
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod. LPU or LEM module	NLAKKU4820