

Tehničke karakteristike artikla: NLEERR023W

Panik svetiljka EE 1x1W ERT-LED 3h 230V AC Wireless radial


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m, with wireless central switching function



Tehnički podaci

Neto visina (mm)	23,00
Neto prečnik (mm)	88,00
Neto težina (kg)	0,35
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Metalna svetiljka
Dizajn	EE
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4

Dimensions (mm)

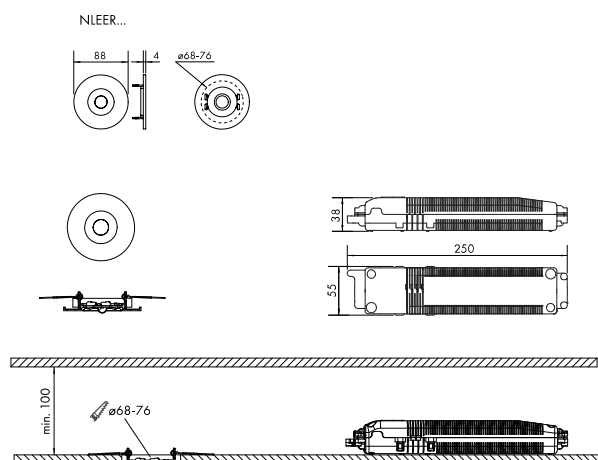

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	3,76	9,62	9,63	9,64	3,76
2,50	1,06	9,67	9,74	10,04	1,11
3,00	0,00	8,00	8,00	8,07	0,00

Tabela artikla

OPIS	Kat. broj
Panik svetiljka EE 1x1W ERT-LED 3h 230V AC Wireless radial White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m, with wireless central switching function	NLEER023W
Dodatni pribor	
Pokrov za EE panik svetiljke, kvadratni, beli komplet sa 2 opruge	NLEEQWS
Pokrov za EE panik svetiljke, kvadratni, antracit komplet sa 2 opruge	NLEEQAZ
Pokrov za EE panik svetiljke, okrugli, antracit komplet sa 2 opruge	NLEERAZ
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod. LPU or LEM module	NLAKKU4820