

Tehničke karakteristike artikla: NLEERS023S

Panik svetiljka EE 1x1W ERT-LED 3h 230V AC spot


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, 1h/3h adjustable



Tehnički podaci

Neto visina (mm)	23,00
Neto prečnik (mm)	88,00
Neto težina (kg)	0,35
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Metalna svetiljka
Dizajn	EE
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4

Dimensions (mm)

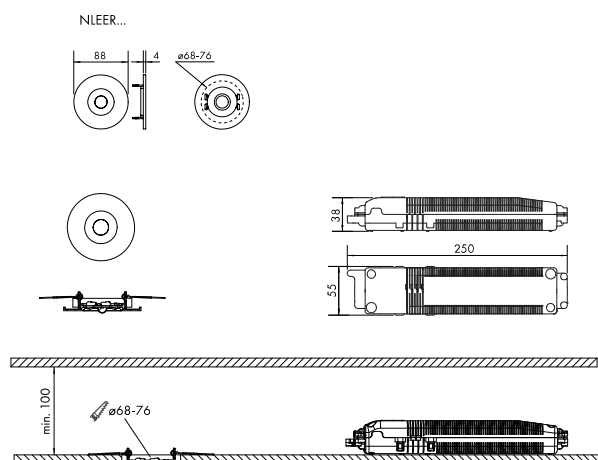

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h-3h autonomy time

Montagehöhe [m]					
2,00	2,00	4,76	4,79	4,84	2,00
2,50	2,25	5,37	5,43	5,48	2,33
3,00	2,43	5,89	5,94	5,99	2,52
3,50	2,64	6,44	6,52	6,59	2,73
4,00	2,80	6,88	6,99	7,09	2,91
5,00	3,00	7,74	7,86	7,96	3,12
6,00	3,20	8,38	8,50	8,64	3,32
7,00	3,12	8,80	8,98	9,14	3,26
8,00	2,92	9,02	9,22	9,42	3,08
9,00	2,40	9,03	9,27	9,48	2,58
10,00	1,96	8,84	9,08	9,32	2,12

Tabela artikla

OPIS	Kat. broj
Panik svetiljka EE 1x1W ERT-LED 3h 230V AC spot White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, 1h/3h adjustable	NLEERS023S
Dodatni pribor	
Pokrov za EE panik svetiljke, kvadratni, beli komplet sa 2 opruge	NLEEQWS
Pokrov za EE panik svetiljke, kvadratni, antracit komplet sa 2 opruge	NLEEQAZ
Pokrov za EE panik svetiljke, okrugli, antracit komplet sa 2 opruge	NLEERAZ
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod. LPU or LEM module	NLAKKU4820