

Tehničke karakteristike artikla: NLFLU030EL

FLU 30W LED protivpanični reflektor 230V AC/DC

Liveni cink, antracit boja, IP66, -25°C do 38°C, sa nadzorom (NLMU06BOX), centralno uključivanje, 5116lm





Tehnički podaci

Neto dužina (mm)	198,00
Neto visina (mm)	183,00
Neto dubina (mm)	37,00
Neto težina (kg)	4,70
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	FLU
Opis boje	RAL 7016 (antracit)
Izvor svetla	LED (30W)
Lumen	5116
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%

Tehnički podaci - nastavak

Power maintained mode (W)	31,50
Power non-maintained mode (W)	1,50
Power max. (W)	31,50
IP stepen zaštite	IP66
Otpornost na udar	IK08
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	38
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

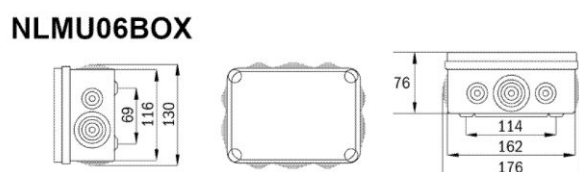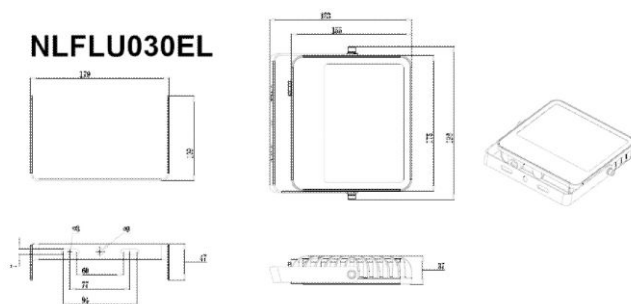

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,73	5,7	5,7	5,7	2,73
2,50	3,42	7,12	7,12	7,12	3,42
3,00	4,1	8,55	8,55	8,55	4,1
3,50	4,79	9,97	9,97	9,97	4,79
4,00	5,47	11,4	11,4	11,4	5,47
5,00	6,84	14,25	14,25	14,25	6,84
6,00	8,21	17,1	17,1	17,1	8,21
7,00	9,58	19,95	19,95	19,95	9,58
8,00	10,74	22,53	22,53	22,53	10,74
9,00	11,81	25,01	25,01	25,01	11,81
10,00	12,83	27,4	27,4	27,4	12,83
12,00	14,69	31,89	31,89	31,89	14,69
14,00	16,36	36,03	36,03	36,03	16,36
16,00	17,9	39,83	39,83	39,83	17,9

OPIS	Kat. broj
------	-----------

FLU 30W LED protivpanični reflektor 230V AC/DC

NLFLU030EL

Liveni cink, antracit boja, IP66, -25°C do 38°C, sa nadzorom (NLMU06BOX), centralno uključivanje, 5116lm