

Tehničke karakteristike artikla: NLILDF028W

Panik svetiljka IL 1x3W ERT-LED 8h 230VAC Wireless u hodniku


Sig.-panik svetiljka za osvetljenje izlazne putanje, osvetljava dužine 11,4m na visini 4m




Tehnički podaci

Neto visina (mm)	36,00
Neto prečnik (mm)	99,00
Neto težina (kg)	0,25
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	IL
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Vreme autonomije (h)	8
Izvor svetla	ERT-LED (3W)
Lumen	110
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,0 NiMh
IP stepen zaštite	IP20
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA Klasa E 8101	AA4


Dimensions NLILD... (mm)

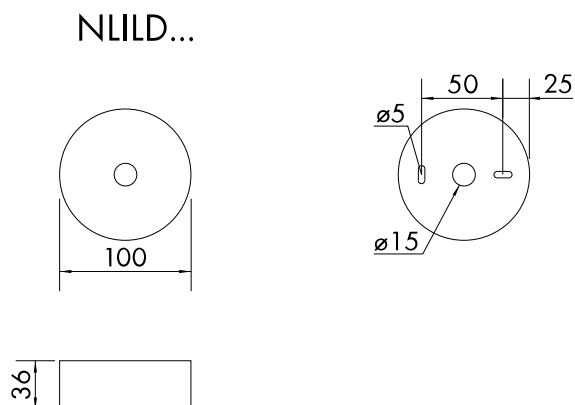


Dimensions accessoires NLILIP65 (mm)

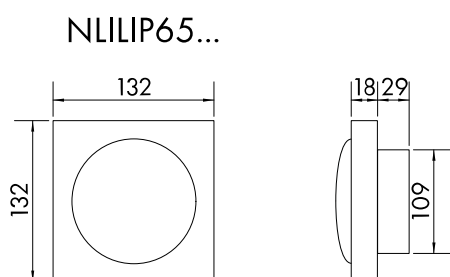


Dimensions accessoires Zinc die-cast housing NLEA.. (mm)

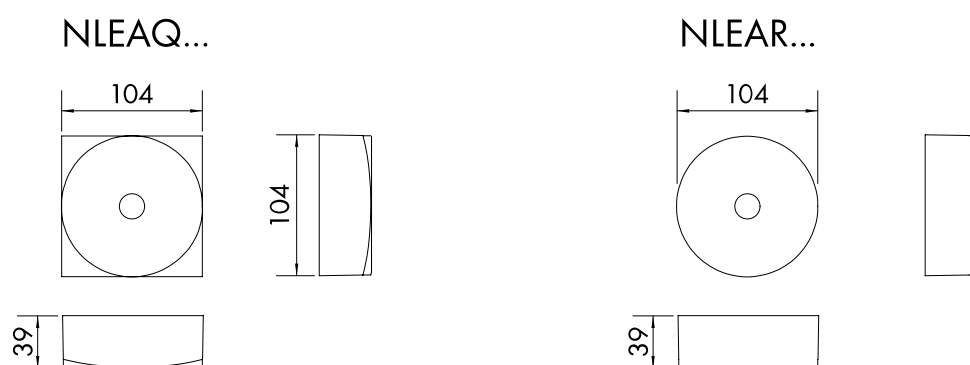

Dimenzija: Panik svetiljka IL1x3W ERT-LED 8h 230VAC Wireless u hodniku

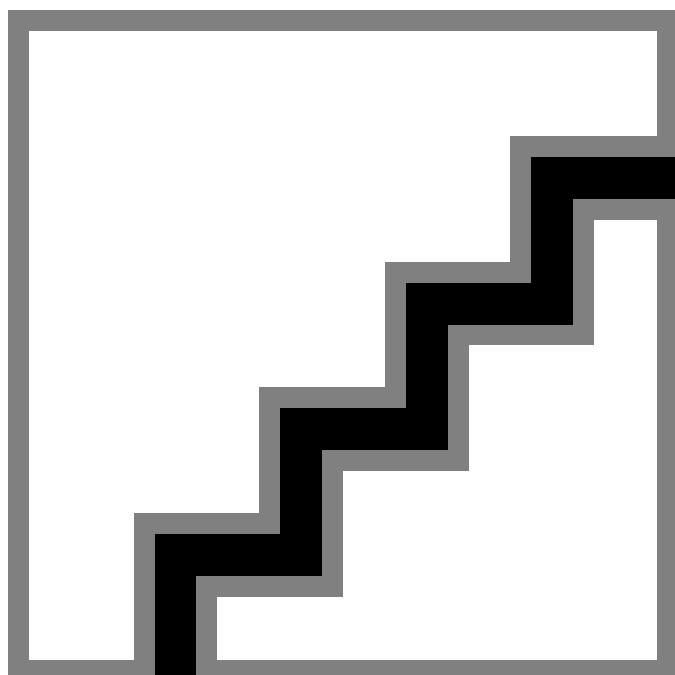

Dimensions recessed frame NLILDE (mm)

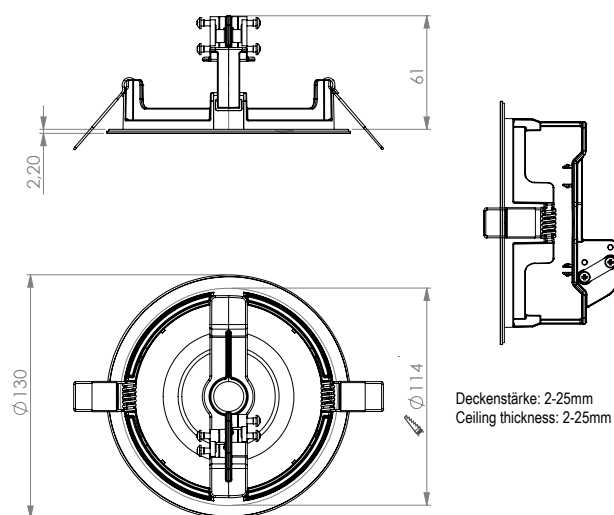

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -8h autonomy time

Montagehöhe [m]					
2,00	1,30	3,89	9,20	15,02	5,49
2,50	1,11	3,88	9,03	16,15	4,91
3,00	0,86	3,71	8,25	15,93	3,22
3,50	0,00	3,32	6,31	14,34	0,00
4,00	0,00	2,80	5,22	11,53	0,00

Tabela artikla

OPIS	Kat. broj
Panik svetiljka IL1x3W ERT-LED 8h 230VAC Wireless u hodniku	NLILDF028W
Sig.-panik svetiljka za osvetljenje izlazne putanje, osvetljaj dužine 11,4m na visini 4m	
Dodatni pribor	
Dodatno kvadratno kućište tip B1 za svetiljku NLILD	NLILB1
Dodatno kvadratno kućište tip B2 za svetiljku NLILD	NLILB2
Priključna kutija bela okrugla, cink	NLEAR
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija antracitokrugla, cink	NLEARAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija bela kvadratna, cink	NLEAQ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija antracit kvadratna, cink	NLEAQAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Distancer ploča za NLILD.. Za uvod kabla sa strane	NLILDAPA
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Nazidno kućište IP65 za svetiljke tip IL	NLILIP65W
Suitable for ceiling mounted emergency luminaires NLILD.., zinc die-cast, IK10, including spacer plate	
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod.	NLAKKU4820
LPU or LEM module	