

Tehničke karakteristike artikla: NLILDLS23W

Panik lampa IL WirelessControl 1x3W ERT-LED 3h 230V AC crna

Plafonska montaža, LiFePO₄ baterija, rasvetna lampa sa promenljivim sočivima za osvetljavanje puteva evakuacije ili okruglih površina, centralno uključivanje




Tehnički podaci

Neto visina (mm)	36,00
Neto prečnik (mm)	99,00
Neto težina (kg)	0,25
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	IL
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (3W)
Lumen	250


Tehnički podaci - nastavak

Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	2,30
Power non-maintained mode (W)	0,40
Power max. (W)	3,40
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Stropna ugradna opcija Plafonska nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA Klasa E 8101	AA4
Proizvođač	Schrack


Dimensions NLILD... (mm)

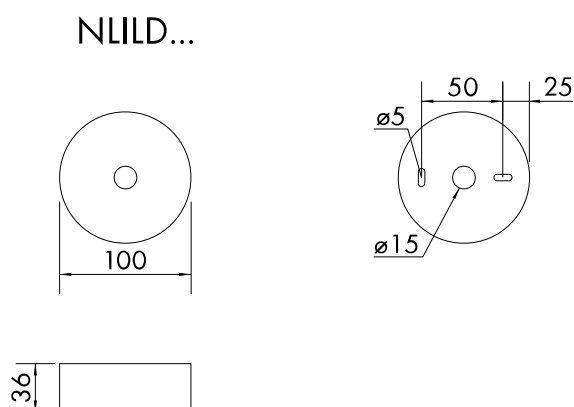


Dimensions accessoires NLILIP65 (mm)

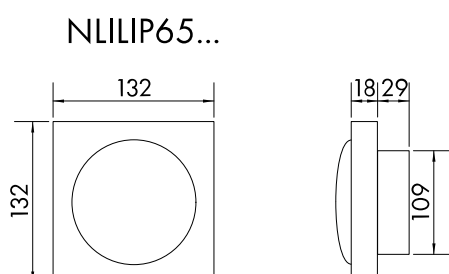

Dimensions accessoires Zinc die-cast housing NLEA.. (mm)

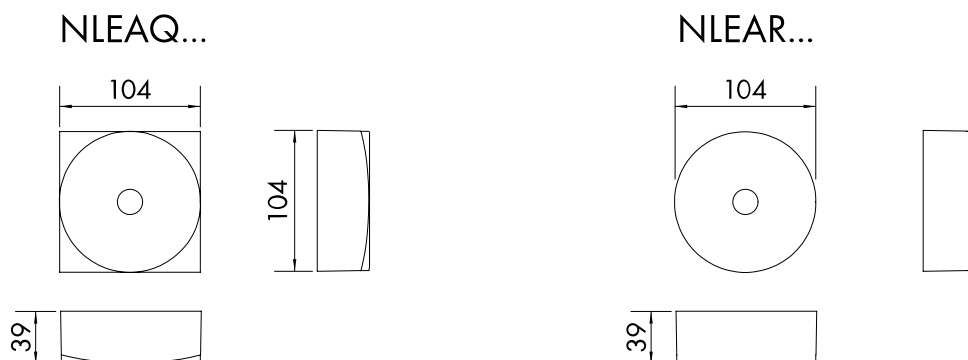

Wall illumination 5 lux for safety devices with optional beam lens (NLLSYSB4) - Maintenance factor 0.8 - 1h/3h

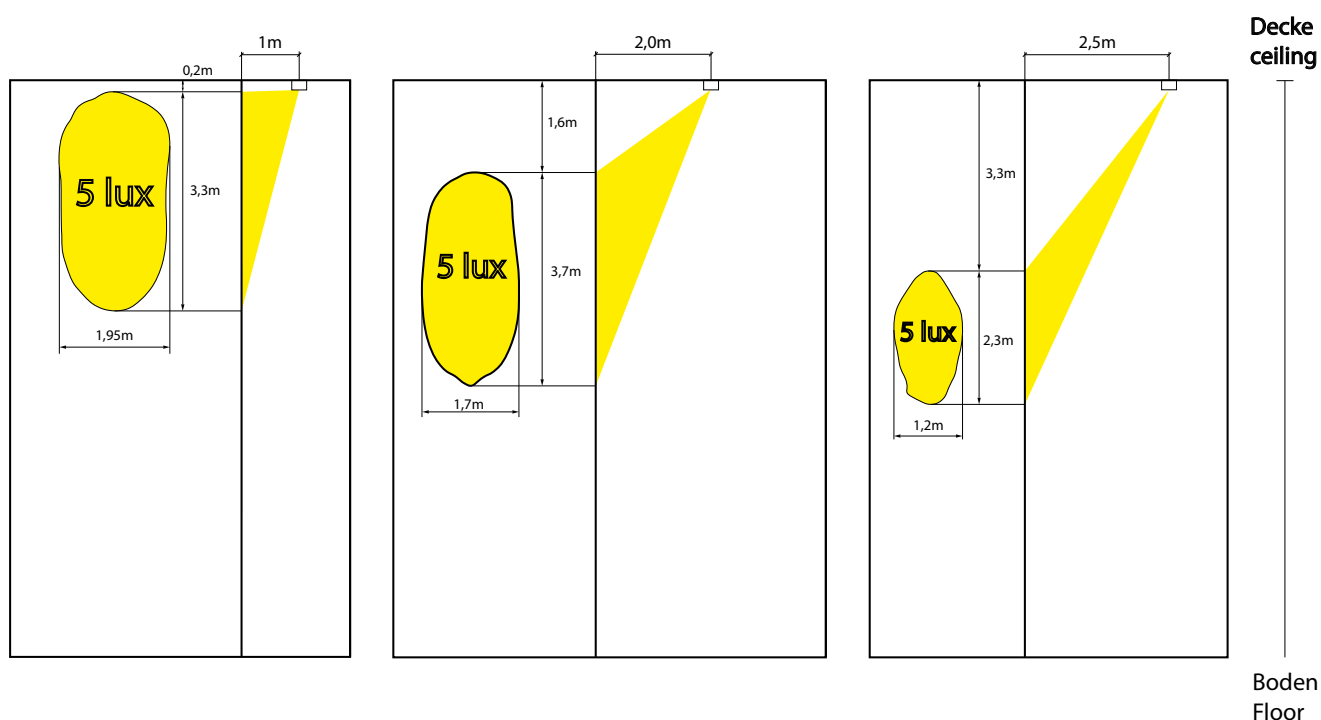

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	2,45	6,67	10,92	15,17	6,67
2,50	2,50	6,89	12,22	17,50	7,71
3,00	2,45	7,10	13,48	19,76	8,56
3,50	2,35	7,18	14,50	21,83	9,28
4,00	2,40	7,15	15,32	23,59	9,89
5,00	2,06	7,10	12,19	22,97	2,87

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,96	8,47	8,47	8,47	3,96
2,50	4,74	10,16	10,16	10,16	4,74
3,00	5,34	11,81	11,81	11,81	5,34
3,50	5,60	13,34	13,34	13,34	5,60
4,00	1,88	12,07	12,07	12,07	1,88

Spacing table with spot lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,15	4,86	4,86	4,86	2,15
3,00	2,42	5,55	5,55	5,55	2,42
3,50	2,71	6,13	6,13	6,13	2,71
4,00	2,95	6,63	6,63	6,63	2,95
5,00	3,36	7,78	7,78	7,78	3,36
6,00	3,73	8,70	8,70	8,70	3,73
7,00	3,99	9,52	9,52	9,52	3,99
8,00	4,13	10,29	10,29	10,29	4,13
9,00	4,17	10,91	10,91	10,91	4,17
10,00	4,12	11,38	11,38	11,38	4,12
12,00	3,71	11,83	11,83	11,83	3,71
14,00	2,80	11,73	11,73	11,73	2,80

Spacing table with high corridor lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,68	4,18	7,30	10,25	4,41
2,50	1,85	4,75	8,28	11,83	4,99
3,00	1,55	5,09	9,09	13,22	5,47
3,50	1,50	5,14	9,72	14,38	5,86
4,00	1,49	4,97	10,14	15,35	6,19
5,00	1,66	4,30	10,51	16,99	6,63
6,00	1,78	4,30	10,80	18,26	6,80
7,00	1,82	4,69	11,06	19,13	6,80
8,00	1,88	4,96	11,07	19,55	6,66
9,00	1,86	5,08	10,89	19,70	6,38
10,00	1,76	5,19	10,75	19,64	5,87
12,00	1,36	5,32	9,72	18,94	4,27

Tabela artikla

OPIS	Kat. broj
Panik lampu IL WirelessControl 1x3W ERT-LED 3h 230V AC crna	
Plafonska montaža, LiFePO4 baterija, rasvetna lampu sa promenljivim sočivima za osvetljavanje puteva evakuacije ili okruglih površina, centralno uključivanje	NLILDLS23W
Dodatni pribor	
Ugradni okvir crne boje za panik svetiljke NLILD.. Required ceiling cut out: diameter 114 mm	NLILDES
Odstojna ploča crna za NLILD.. za bočni uvod kablova	NLILDAPA2S
Promenljiva sočiva: Tačkasto osvetljenje za visoke prostorije Pogodno za svetiljke za hitne slučajeve sa promenljivim sistemom sočiva	NLSYSS4
Dodatno kvadratno kućište tip B1 za svetiljku NLILD	NLILB1
Dodatno kvadratno kućište tip B2 za svetiljku NLILD	NLILB2
Priključna kutija bela okrugla, cink Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Priključna kutija antracitokrugla, cink Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Priključna kutija bela kvadratna, cink Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Priključna kutija antracit kvadratna, cink Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR l x h x d: 200 x 200 x 90mm	NLBALL3
Nadgradno kućište IP65 bele boje za seriju NLILD Polikarbonat, sa bočnim uvodom kablova	NLILIP65K

Tabela artikla

OPIS	Kat. broj
Dodatni pribor	
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW	NLAKKU3230
LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	
Kućište IP65 za IL plafonske svetiljke,crne	NLILIK10A
Pogodno za površinsko postavljene plafonjere NLILD ..., uključujući distantnu ploču, otpornu na vandalski test sa otpornošću na udarce prema IK10, otpornost na udar kugle prema DIN 18032	