


Tehničke karakteristike artikla: NLILDR0235

Panik svet. IL ERT-LED 1x3W 3h 230V AC, nadgradna, radijalno

Sigurnosna panik svetiljka za osvetljenje izlazne putanje, osvetljaj dužine 8,9m na visini 4m

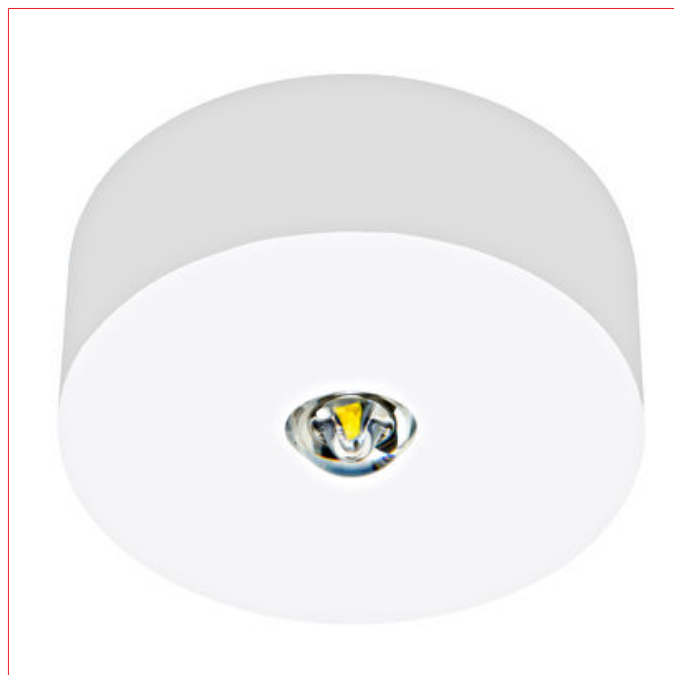


Tehnički podaci

Neto visina (mm)	36,00
Neto prečnik (mm)	99,00
Neto težina (kg)	0,25
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	IL
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (3W)
Lumen	240
Područje napona (V)	230V AC 50Hz ±20%


Tehnički podaci - nastavak

Baterije (V/Ah)	4,8/2,0 NiMH
IP stepen zaštite	IP40
Način montaže	Plafonska nadgradna
AA Klasa E 8101	AA4


Dimensions NLILD... (mm)

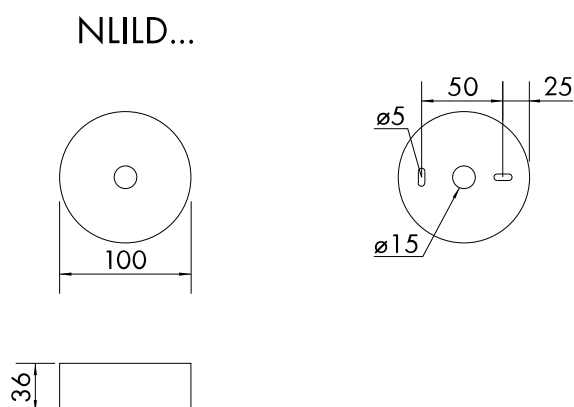


Dimensions accessoires NLILIP65 (mm)

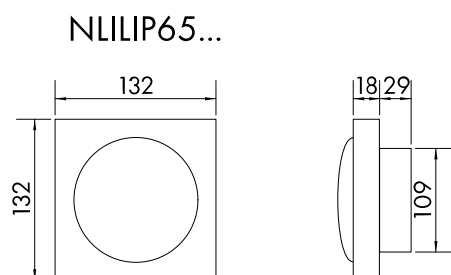

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

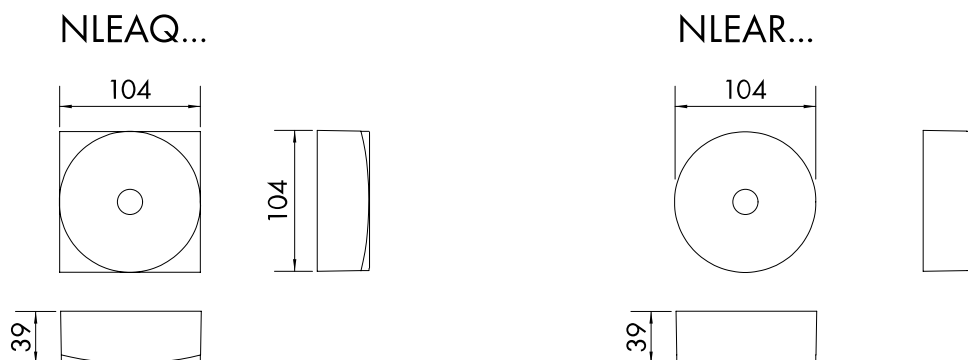

Dimensions recessed frame NLILDE (mm)

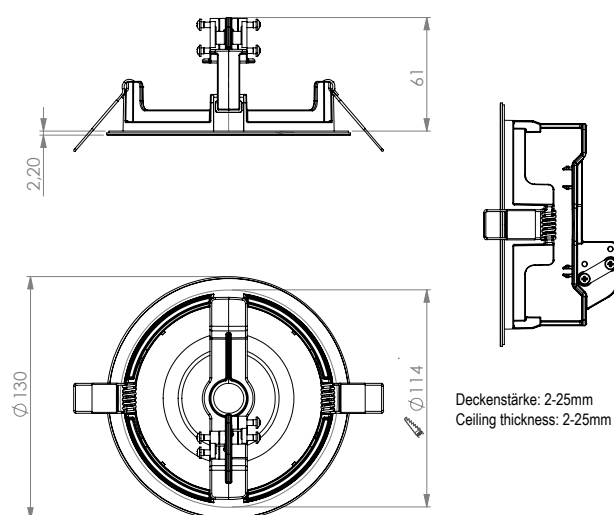

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	4.29	10.07	10.07	10.07	4.29
2,50	4.16	11.44	11.44	11.44	4.16
3,00	1.95	12.22	12.22	12.22	1.95
3,50	0,00	10.04	10.04	10.04	0,00
4,00	0,00	8,70	8,70	8,70	0,00

Tabela artikla

OPIS	Kat. broj
Panik svet. IL ERT-LED 1x3W 3h 230V AC, nadgradna, radijalno	NLILDR023S
Sigurnosna panik svetiljka za osvetljenje izlazne putanje, osvetljaj dužine 8,9m na visini 4m	
Dodatni pribor	
Dodatno kvadratno kućište tip B1 za svetiljku NLILD	NLILB1
Dodatno kvadratno kućište tip B2 za svetiljku NLILD	NLILB2
Priključna kutija bela okrugla, cink	NLEAR
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija antracitokrugla, cink	NLEARAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija bela kvadratna, cink	NLEAQ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Priključna kutija antracit kvadratna, cink	NLEAQAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Distancer ploča za NLILD.. Za uvod kabla sa strane	NLILDAPA
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Nazidno kućište IP65 za svetiljke tip IL	NLILIP65W
Suitable for ceiling mounted emergency luminaires NLILD.., zinc die-cast, IK10, including spacer plate	
Baterija 4,8V 2,0Ah za LED svet. sa sopstv. nap. sa LPU mod.	NLAKKU4820
LPU or LEM module	