

Tehničke karakteristike artikla: NLILEL423W

Emerg.lum. IL Wireless 1x3W ERTLED 3h

230VAC podesiva sočiva

Plafonska montaža, LiFePO₄ baterija, rasvetna svetiljka sa promenljivim sočivima za osvetljavanje puteva za evakuaciju ili velikih površina, centralno prekidna




Tehnički podaci

Neto visina (mm)	95,00
Neto prečnik (mm)	122,00
Neto težina (kg)	0,30
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	IL
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (3W)
Lumen	250


Tehnički podaci - nastavak

Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	2,30
Power non-maintained mode (W)	0,40
Power max. (W)	3,40
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP20
Otpornost na udar	≥ IK03
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions NLILE... (mm)

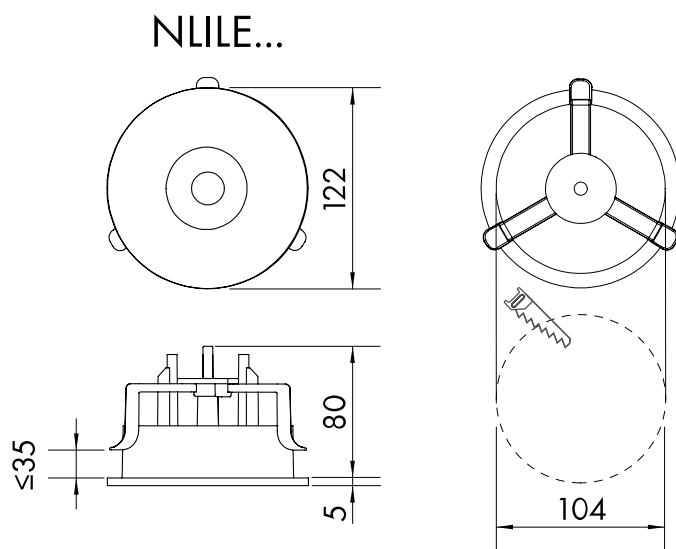

Wall illumination 5 lux for safety devices with optional beam lens (NLLSYSB4)
- Maintenance factor 0.8 - 1h/3h

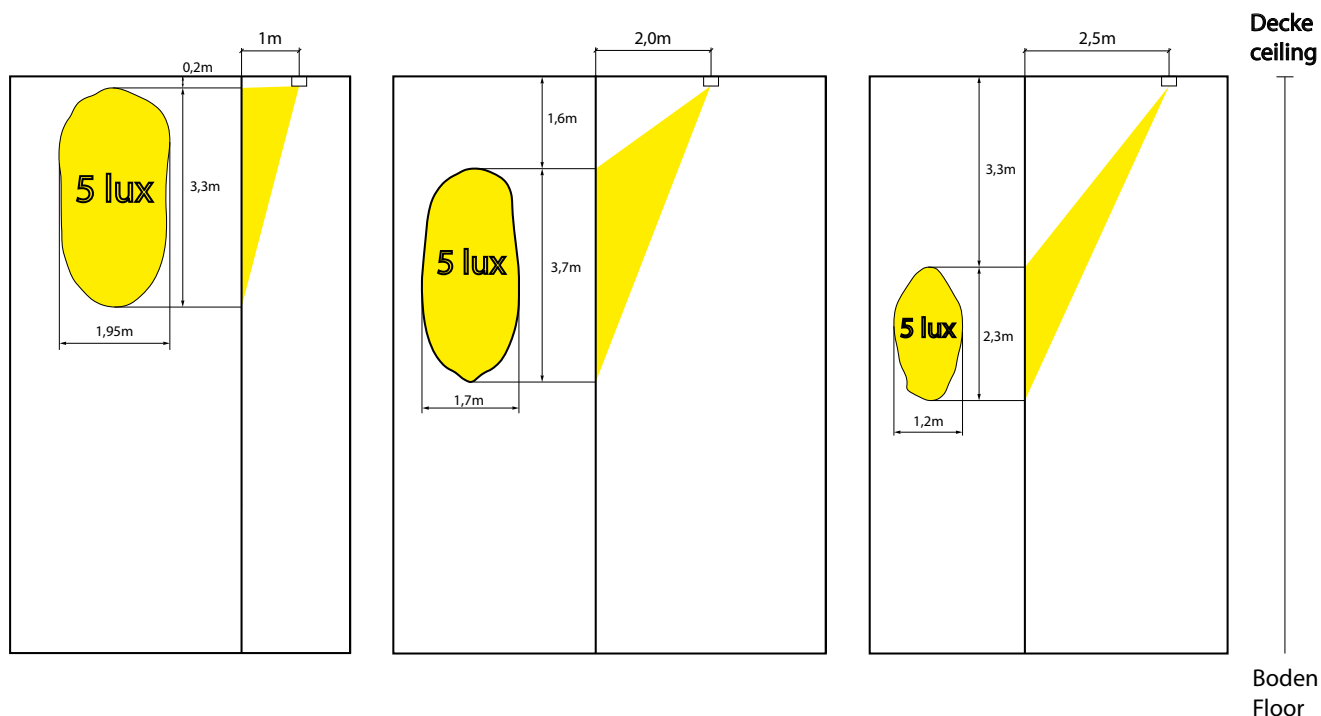

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	2,45	6,67	10,92	15,17	6,67
2,50	2,50	6,89	12,22	17,50	7,71
3,00	2,45	7,10	13,48	19,76	8,56
3,50	2,35	7,18	14,50	21,83	9,28
4,00	2,40	7,15	15,32	23,59	9,89
5,00	2,06	7,10	12,19	22,97	2,87

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,96	8,47	8,47	8,47	3,96
2,50	4,74	10,16	10,16	10,16	4,74
3,00	5,34	11,81	11,81	11,81	5,34
3,50	5,60	13,34	13,34	13,34	5,60
4,00	1,88	12,07	12,07	12,07	1,88

Spacing table with spot lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,15	4,86	4,86	4,86	2,15
3,00	2,42	5,55	5,55	5,55	2,42
3,50	2,71	6,13	6,13	6,13	2,71
4,00	2,95	6,63	6,63	6,63	2,95
5,00	3,36	7,78	7,78	7,78	3,36
6,00	3,73	8,70	8,70	8,70	3,73
7,00	3,99	9,52	9,52	9,52	3,99
8,00	4,13	10,29	10,29	10,29	4,13
9,00	4,17	10,91	10,91	10,91	4,17
10,00	4,12	11,38	11,38	11,38	4,12
12,00	3,71	11,83	11,83	11,83	3,71
14,00	2,80	11,73	11,73	11,73	2,80

Spacing table with high corridor lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,68	4,18	7,30	10,25	4,41
2,50	1,85	4,75	8,28	11,83	4,99
3,00	1,55	5,09	9,09	13,22	5,47
3,50	1,50	5,14	9,72	14,38	5,86
4,00	1,49	4,97	10,14	15,35	6,19
5,00	1,66	4,30	10,51	16,99	6,63
6,00	1,78	4,30	10,80	18,26	6,80
7,00	1,82	4,69	11,06	19,13	6,80
8,00	1,88	4,96	11,07	19,55	6,66
9,00	1,86	5,08	10,89	19,70	6,38
10,00	1,76	5,19	10,75	19,64	5,87
12,00	1,36	5,32	9,72	18,94	4,27

Tabela artikla

OPIS	Kat. broj
Emerg.lum. IL Wireless 1x3W ERTLED 3h 230VAC podesiva sočiva Plafonska montaža, LiFePO4 baterija, rasvetna svetiljka sa promenljivim sočivima za osvetljavanje puteva za evakuaciju ili velikih površina, centralno prekidna	NLILEL423W
Dodatni pribor	
Promenljiva sočiva: Tačkasto osvetljenje za visoke prostorije Pogodno za svetiljke za hitne slučajeve sa promenljivim sistemom sočiva	NLLSYSS4
Alat za lako otvaranje ugradnih svetiljki tip IL	NLILTOOL
HSS Bi-metal cilindar pila (kruna), promjer 105mm, dubina,	GI63290105
Pleksiglas za zaštitu kugle lxwx d = 190x190x62mm, za IL / EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR l x h x d: 200 x 200 x 90mm	NLBALL3
Promenljiva sočiva: Tačkasto osvetljenje za visoke prostorije Pogodno za svetiljke za hitne slučajeve sa promenljivim sistemom sočiva	NLLSYSS4
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC, KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230