

Tehničke karakteristike artikla: NLILE5029E

Protiv - panična svetiljka IL 1x3W ERT-LED spot ugradno


White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 12,6m at a room height of 14m, with supervision - centrally switchable



Tehnički podaci

Neto visina (mm)	90,00
Neto prečnik (mm)	122,00
Neto težina (kg)	0,35
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Plastične svetiljke
Dizajn	IL
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Izvor svetla	ERT-LED (3W)
Lumen	360
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stepen zaštite	IP20
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions NLILE... (mm)

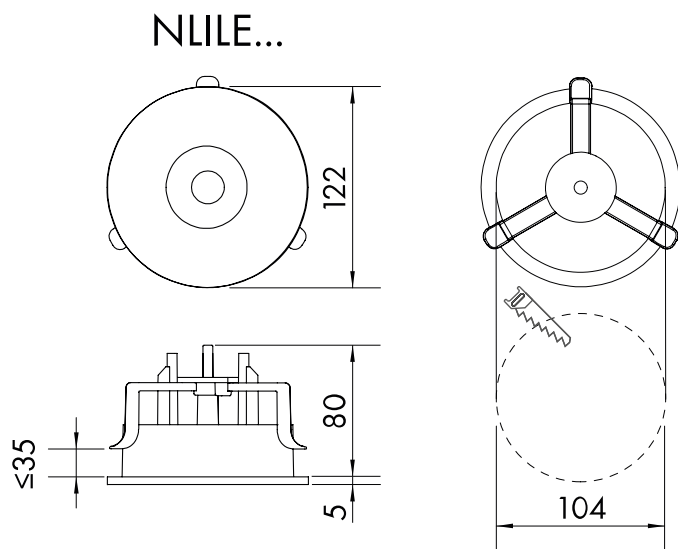

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,22	5,34	5,38	5,41	2,30
2,50	2,78	6,67	6,72	6,76	2,88
3,00	3,11	7,62	7,68	7,74	3,11
3,50	3,26	8,15	8,21	8,27	3,38
4,00	3,48	8,67	8,74	8,82	3,60
5,00	3,90	9,70	9,64	9,60	3,90
6,00	4,20	10,50	10,44	10,36	4,04
7,00	4,38	11,22	11,14	11,04	4,20
8,00	4,44	11,82	11,70	11,56	4,26
9,00	4,38	12,27	12,15	12	4,38
10,00	4,44	12,68	12,52	12,32	4,24
12,00	3,66	12,99	12,78	12,57	3,66
14,00	2,96	12,68	12,44	12,24	2,72
16,00	1,68	11,64	11,44	11,24	1,68

Tabela artikla

OPIS	Kat. broj
Protiv - panična svetiljka IL 1x3W ERT-LED spot ugradno White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high hallswith luminaire distance 12,6m at a room height of 14m, with supervision - centrally switchable	NLILES029E
Dodatni pribor	
Alat za lako otvaranje ugradnih svjetiljki tip IL	NLILTOOL
HSS Bi-metal cilindar pila (kruna), promjer 105mm, dubina,	GI63290105
Pleksiglas za zaštitu kugle lxwd = 190x190x62mm, za IL / EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Uzidno kućište XL 150 za montažu u beton	GTDP870
Uzidno kućište sa prečnikom montaže 0-140mm za ugradnju zvučnika, rasvete maksimalne dubine ugradnje 108mm	
Prednji poklopac za ugradno kućište XL 150 sa min. vlaknima	
Poklopac sa mineralnim vlaknima koji obezbeđuju fleksibilnost poklopca prilikom ugradnje sa prečnikom montažnog otvora 0-140mm	GTDP874