

Tehničke karakteristike artikla: NLK6UT33SC

Samostalna svetiljka K6, autotest, ERT-LED 3h 230VAC

LiFePO₄ baterija pogodna za niske temperature od -25° do 40°C, uključujući set zamenljivih sočiva za osvetljenje prostora i hodnika, za nadgradnu ili ugradnu montažu u plafon, pogodna za rad u pripravnosti, 300lm




Tehnički podaci

Neto visina (mm)	58,00
Neto prečnik (mm)	123,00
Neto težina (kg)	0,30
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Samokontrola niske temperature
Verzija	Plastične svetiljke
Dizajn	K6
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Izvor svetla	ERT-LED (5W)
Lumen	300

Tehnički podaci - nastavak

Opseg napona (V)	230V AC 50Hz ±20%
Snaga (W)	3
Baterije (V/Ah)	3,2/3,2 LiFePO4
IP stepen zaštite	IP20
Otpornost na udar	IK06
Način montaže	Plafonska ugradna Univerzalna Plafonska nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA5
Proizvođač	Schrack

Dimensions (mm)

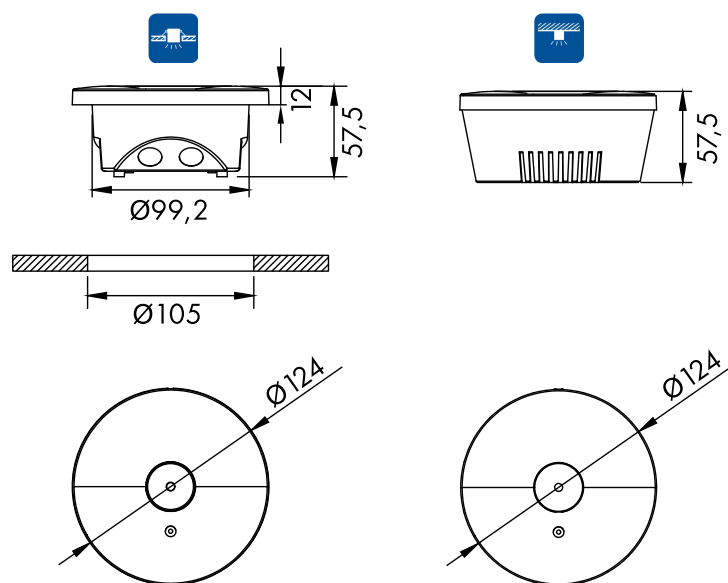

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,16	4,68	7,58	9,23	3,94
2,50	2,47	5,43	9,00	11,17	4,75
3,00	2,70	6,03	10,12	12,92	5,47
3,50	2,91	6,58	11,22	14,39	6,07
4,00	3,07	7,14	12,22	15,82	6,60
5,00	3,15	7,92	13,71	18,33	7,41
6,00	2,68	8,32	14,62	20,15	7,83
7,00	0,92	8,29	14,93	21,48	7,77

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,77	8,90	9,13	8,70	3,59
2,50	4,12	10,00	10,23	9,98	3,95
3,00	4,38	10,81	11,05	10,78	4,21
3,50	4,57	11,48	11,72	11,47	4,41
4,00	4,69	12,03	12,27	12,02	4,53
5,00	4,74	12,81	13,07	12,82	4,60
6,00	4,53	13,22	13,47	13,23	4,41
7,00	4,05	13,28	13,49	13,28	3,92
8,00	3,20	12,97	13,16	12,97	3,04
9,00	1,39	12,31	12,47	12,29	1,27

Tabela artikla

OPIS	Kat. broj
Samostalna svetiljka K6, autotest, ERT-LED 3h 230VAC LiFePO4 baterija pogodna za niske temperature od -25° do 40°C, uključujući set zamenljivih sočiva za osvetljenje prostora i hodnika, za nadgradnu ili ugradnu montažu u plafon, pogodna za rad u pripravnosti, 300lm	NLK6UT33SC
Dodatni pribor	
Litijumska baterija LiFePO4 3,2V 3.2Ah za NLK6U433SC i NLK5UT13SC	NLAKKU3232