

Tehničke karakteristike artikla: NLKBU003WL

Sigurnosna svetiljka KB Wireless LED, 3h, 230VAC, univer. mont.

Univerzalna montaža, 6x0,5W HP LED, IP65, 12V/0,8Ah baterija



Tehnički podaci

Neto dužina (mm)	332,00
Neto širina (mm)	48,00
Neto visina (mm)	242,00
Neto težina (kg)	1,20
Vrsta svetiljke (prema načinu primene)	modularna bezbednosna svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	KB
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	LED (3W)
Lumen	150
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	12/0,8 NiMh
IP stepen zaštite	IP65
Otpornost na udar	IK05
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid

Tehnički podaci - nastavak

AA Klasa E 8101


AA4

Proizvođač


Schrack

Dimensions (mm)



NLKBU...



NLKBE

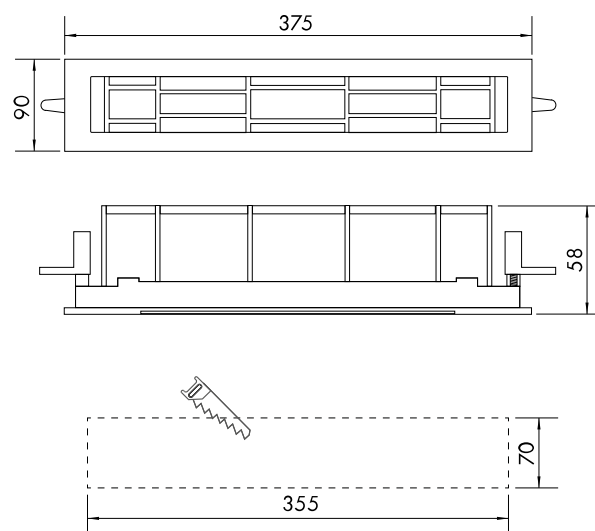


Drilling distances (mm)

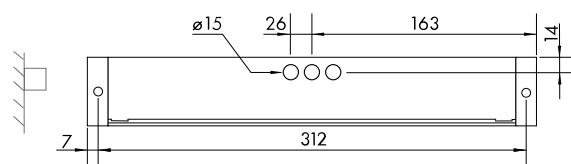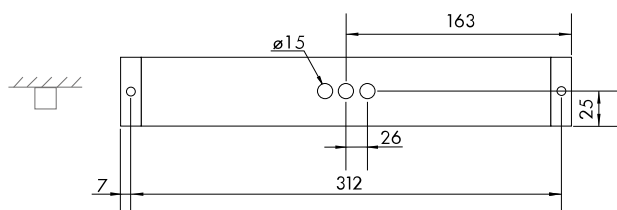


Dimensions (mm) optional pictogram edges


NLKBG

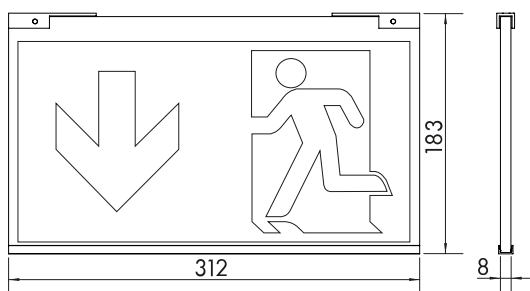

NLKBM

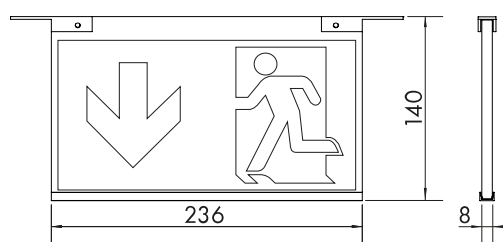

NLKBK

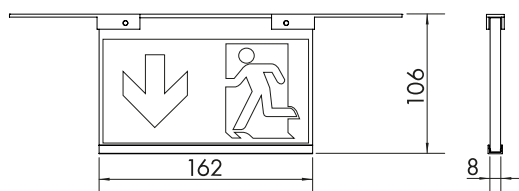

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2.00	2.65	6.81	6.80	6.79	2.65
2.50	2.78	7.36	7.38	7.40	2.78
3.00	2.90	7.79	7.79	7.80	2.80
3.50	2.83	8.09	8.05	8.01	2.73
4.00	2.80	8.25	8.18	8.10	2.60

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetiljka KB Wireless LED, 3h, 230VAC, univer. mont.	NLKBU003WL
Univerzalna montaža, 6x0,5W HP LED, IP65, 12V/0,8Ah baterija	
Dodatni pribor	
Ploča za svetiljku KB, komplet 4 piktograma, 22m	NLKBM
Ploča za svetiljku KB, komplet 4 piktograma, 30m	NLKBG
Ploča za svetiljku KB, komplet 4 piktograma, 14m	NLKBK
Zaštita od kiše za svetiljku Dizajn KB, pleksiglas	NLKBRD
Okvir za ugradnju u plafon za svetiljku tip KB	NLKBE
Required ceiling cut out: 355 x 70 mm	
Kućište za ugradnju u beton za svetiljke tipa KB	NLKBBE
Paralelni zidni nosač za svetiljku tipa KB	NLAWW008
Napajanje 12V 0,8Ah za Bus kontrolu svetiljki, bežični	NLAKKU1208
Par cevnih nosača 500mm beli, mont. na plafon, ožičeni	NL2DS
Par cevnih nosača DESIGN, 500mm, beli, ožičeni (nije IP65)	NL2DW
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4