

Tehničke karakteristike artikla: NLKBU0085C

KB LED 8h autonomije, 230V AC, autotest, univerz. mont.

1h/3h/8h adjustable, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm





Tehnički podaci

Neto dužina (mm)	326,00
Neto širina (mm)	50,00
Neto visina (mm)	50,00
Neto težina (kg)	0,90
Vrsta svetiljke (prema načinu primene)	modularna bezbednosna svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke Pljosnate svjetiljke
Dizajn	KB
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Vreme autonomije (h)	8
Izvor svetla	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	9,6/2,0 NiMh
IP stepen zaštite	IP65
Otpornost na udar	IK05



Tehnički podaci - nastavak

Način montaže	Stropna ugradna opcija
	Univerzalna
	Plafonska nadgradna
	Montaža na zid
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

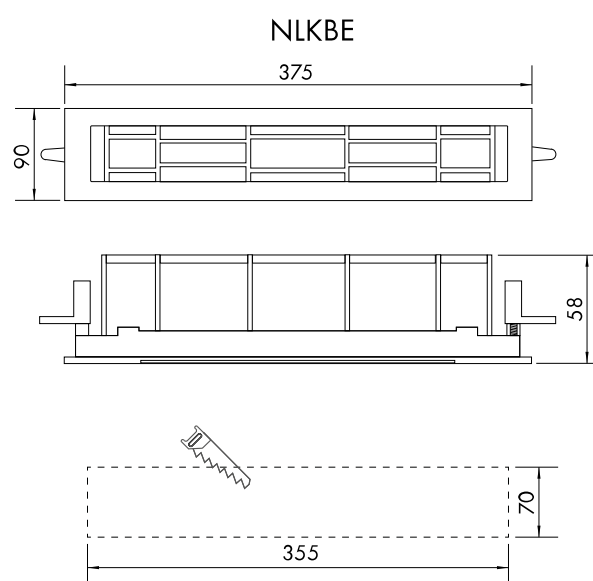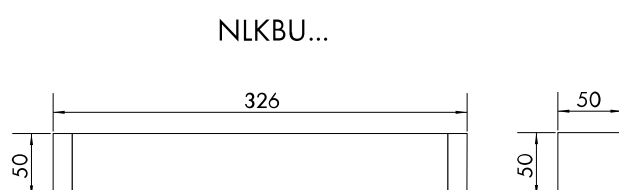


Drilling distances (mm)

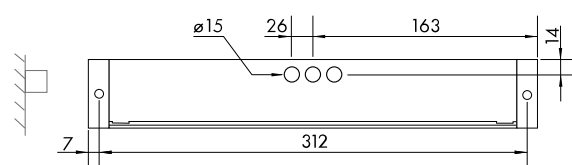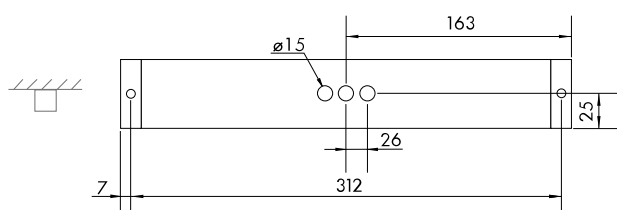


Dimensions (mm) optional pictogram edges


NLKBG

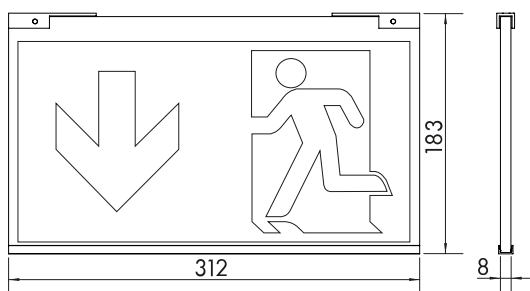

NLKBM

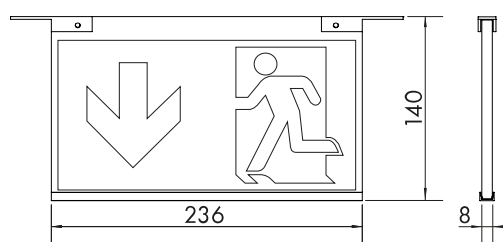

NLKBK

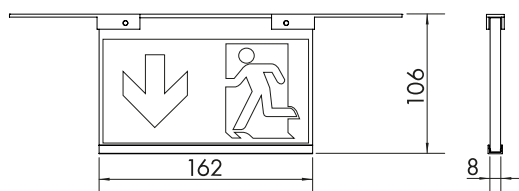

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2.00	3,33	8,41	8,29	8,17	3,33
2.50	3,57	9,21	9,15	9,09	3,57
3.00	3,84	9,84	9,84	9,84	3,84
3.50	4,03	10,37	10,40	10,43	3,89
4.00	4,00	10,82	10,84	10,86	4,00

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 -8h autonomy time

Montagehöhe [m]					
2.00	2,47	6,34	6,35	6,36	2,47
2.50	2,59	6,82	6,83	6,85	2,50
3.00	2,61	7,18	7,15	7,12	2,52
3.50	2,54	7,37	7,30	7,24	2,36
4.00	2,31	7,43	7,32	7,21	2,04

Tabela artikla

OPIS	Kat. broj
KB LED 8h autonomije, 230V AC, autotest, univerz. mont. 1h/3h/8h adjustable, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKBU008SC
Dodatni pribor	
Ploča za svetiljku KB, komplet 4 piktograma, 22m	NLKBM
Ploča za svetiljku KB, komplet 4 piktograma, 30m	NLKBG
Ploča za svetiljku KB, komplet 4 piktograma, 14m	NLKBK
Zaštita od kiše za svetiljku Dizajn KB, pleksiglas	NLKBRD
Okvir za ugradnju u plafon za svetiljku tip KB Required ceiling cut out: 355 x 70 mm	NLKBE
Kučiste za ugradnju u beton za svetiljke tipa KB	NLKBBE
Baterija 9,6V 2,0Ah sa ERT-LED, 1h,3h,8h Suitable for LPU module	NLAKKU9620
Par cevnih nosača 500mm beli, mont. na plafon, ožičeni	NL2DS
Par cevnih nosača DESIGN, 500mm, beli, ožičeni (nije IP65)	NL2DW
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4