

Tehničke karakteristike artikla: NLKCDP403S

Samostalna svetiljka KC self-contr. LED 3h 230V

Opcije podešavanja 1 h/3 h/8 h, udaljenost gledanja: 30 m, 1 h: 300 lm; 3h: 150lm, LiFePO4 baterija



Tehnički podaci


Neto dužina (mm)	356,00
Neto širina (mm)	179,00
Neto visina (mm)	108,00
Neto težina (kg)	1,00
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KC
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010

Tehnički podaci - nastavak


Područje prepoznavanja/domet (m)	30
Vreme autonomije (h)	1/3/8
Izvor svetla	LED (3W)
Lumen	1h: 300;3h: 150
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,40
Power max. (W)	4,20
Baterije (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimenzija: Samostalna svetiljka KC self-contr. LED 3h 230V

NLKCD...

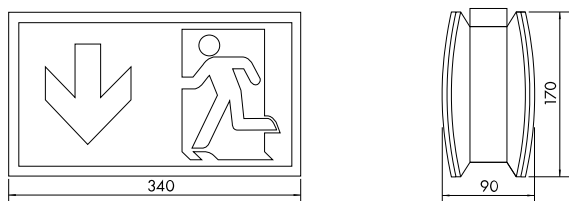

Dimenzija: Samostalna svetiljka KC self-contr. LED 3h 230V

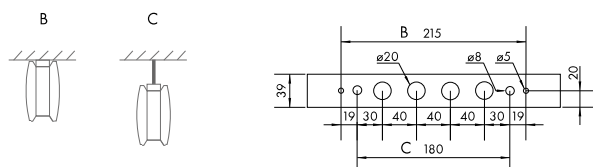

Lista fajlova: Samostalna svetiljka KC self-contr. LED 3h 230V

					
2,00	3,35	8,21	8,18	8,16	3,39
2,50	3,64	9,03	9,07	9,11	3,71
3,00	3,87	9,74	9,82	9,90	3,92
3,50	4,04	10,31	10,41	10,51	4,06
4,00	3,99	10,80	10,89	10,99	4,14

Tabela artikla

OPIS	Kat. broj
Samostalna svetiljka KC self-contr. LED 3h 230V	NLKCDP403S
Opcije podešavanja 1 h/3 h/8 h, udaljenost gledanja: 30 m, 1 h: 300 lm; 3h: 150lm, LiFePO4 baterija	
Dodatni pribor	
Zidni nosač beli za KC seriju	NLAWWK
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4
Plug-pictogram levo gore za svetiljke dizajn KC viewing distance: 30m	NLKCIPIKTLO
Plug-pictogram levo dole za svetiljke dizajn KC viewing distance: 30m	NLKCIPIKTLU
Plug-pictogram desno gore za svetiljke dizajn KC viewing distance: 30m	NLKCIPIKTRO
Plug-pictogram desno dole za svetiljke dizajn KC viewing distance: 30m	NLKCIPIKTRU
Set 2 aku. LiFePO4 3,2V 1,6Ah za svetiljke bez LEO ili LPK LiFePO4-Lit.-gvož. fosfat baterija, UN3480: Lit.-jon. bat.	NLAKKU3216