

Tehničke karakteristike artikla: NLKCDP509C

Emergency luminaire KC 6x0, 5W LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m



Tehnički podaci


Neto dužina (mm)	356,00
Neto širina (mm)	179,00
Neto visina (mm)	108,00
Neto težina (kg)	1,00
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Plastične svetiljke
Dizajn	KC
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	30

Tehnički podaci - nastavak

Izvor svetla	LED (3W)
Lumen	300
Opseg napona (V)	24V AC
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimenzija: Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting

NLKCD...

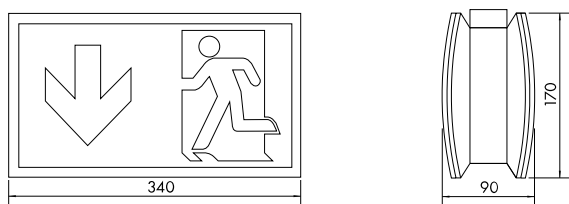

Dimenzija: Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting

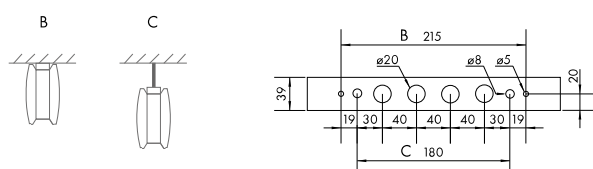


Tabela artikla

OPIS	Kat. broj
Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting with supervision - centrally switchable, viewing distance: 30m	NLKCDP509C
Dodatni pribor	
Zidni nosač beli za KC seriju	NLAWWKC
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4
Plug-pictogram levo gore za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram levo dole za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram desno gore za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram desno dole za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTRU