

Tehničke karakteristike artikla: NLKCWP433W

Panik svetiljka KC Wi Fi Control LED 3h 230V AC

Evakuacijski znak za IZLAZ - zidna nadgradna montaža; nužna sigurnosna svjetiljka za stropnu nadgradnu montažu, vidljivost 30m, upravljiva, integrirana LiFePO4 baterija, 520lm



Tehnički podaci



Neto dužina (mm)	340,00
Neto širina (mm)	170,00
Neto visina (mm)	60,00
Neto težina (kg)	0,90
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	KC
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)

Tehnički podaci - nastavak


Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	30
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (4W)
Lumen	520
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Baterije (V/Ah)	2x3,2/3,3 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	IK06
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLKCW...



Dimensions (mm)

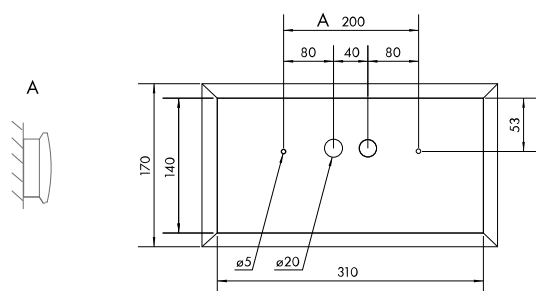

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	6,71	14,81	11,70	8,55	3,41
2,50	7,87	17,56	13,45	9,30	3,57
3,00	8,91	20,07	15,04	9,87	3,71
3,50	9,85	22,37	16,34	10,10	3,66
4,00	10,47	24,49	17,50	10,39	3,68
5,00	11,03	28,33	19,48	10,35	3,66
6,00	7,88	29,75	19,00	10,45	3,50
7,00	7,03	28,80	16,40	10,44	3,06
8,00	3,68	27,04	15,74	10,18	1,81

Spacing table with round lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,26	9,50	9,50	9,50	4,26
2,50	5,03	11,13	11,13	11,13	5,03
3,00	5,72	12,65	12,65	12,65	5,72
3,50	6,33	14,17	14,17	14,17	6,33
4,00	6,85	15,57	15,57	15,57	6,85
5,00	6,61	18,05	18,05	18,05	6,61
6,00	3,22	17,56	17,56	17,56	3,22

Spacing table with spot lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,93	4,83	4,83	4,83	1,93
2,50	2,41	6,04	6,04	6,04	2,41
3,00	2,90	7,25	7,25	7,25	2,90
3,50	3,24	8,00	8,00	8,00	3,24
4,00	3,46	8,33	8,33	8,33	3,46
5,00	3,94	9,27	9,27	9,27	3,94
6,00	4,36	10,12	10,12	10,12	4,36
7,00	4,72	11,13	11,13	11,13	4,72
8,00	5,03	12,02	12,02	12,02	5,03
9,00	5,26	12,74	12,74	12,74	5,26
10,00	5,41	13,46	13,46	13,46	5,41
12,00	5,47	14,61	14,61	14,61	5,47
14,00	5,28	15,30	15,30	15,30	5,28
16,00	4,78	15,55	15,55	15,55	4,78

Spacing table with high corridor lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,39	10,17	7,81	5,45	2,01
2,50	5,48	12,72	9,76	6,81	2,51
3,00	6,14	14,49	11,12	7,76	2,85
3,50	6,68	15,86	11,90	7,93	2,85
4,00	7,15	17,10	12,62	8,07	2,76
5,00	7,90	19,28	13,69	8,10	2,25
6,00	8,47	21,13	14,47	7,81	2,20
7,00	8,82	22,60	14,77	6,44	2,32
8,00	9,03	23,81	14,75	6,39	2,40
9,00	9,10	24,73	15,04	6,37	2,39
10,00	8,99	25,38	15,14	6,63	2,42
12,00	8,48	26,08	14,86	6,79	2,32
14,00	7,37	25,94	14,34	6,88	2,03
16,00	5,18	25,09	13,11	6,78	1,54

Tabela artikla

OPIS	Kat. broj
Panik svetiljka KC Wi Fi Control LED 3h 230V AC	
Evakuacijski znak za IZLAZ - zidna nadgradna montaža; nužna sigurnosna svjetiljka za stropnu nadgradnu montažu, vidljivost 30m, upravljiva, integrirana LiFePO4 baterija, 520lm	NLKCWP433W
Dodatni pribor	
Poklopac za zaštitu od kiše za KC , pleksi	NLKCRD
Kućište za montažu KC u beton	NLKCBERO

Tabela artikla

OPIS	Kat. broj
Dodatni pribor	
Ugradni ram za sigurnosne svetiljke KC Required ceiling cut out: 320 x 150 mm	NLKCER00
Zaptivka IP65 za KC svetiljke	NLKCIP65
Prizmatični poklopac sa visećim piktogramom za svetiljku KC	NLKCH
Prizmatični poklopac za sigurnosnu svetiljku KC	NLKCPR
Set od 2 bat. 3.2V 3.3Ah LiFePO4 bež. Kontrol. Svet. sa LEO LifePO4 - Litijum metalna fosfatna baterija, UN3480- UN 3480: Litijum jonska baterija	NLAKKU323L
Zaštitna rešetka za serije KC, KX, PF, LX, RX	NLBALL2
Plug-pictogram levo gore za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram levo dole za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram desno gore za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram desno dole za svetiljke dizajn KC viewing distance: 30m	NLKCPIKTRU
Set od 2 bat. 3.2V 3.3Ah LiFePO4 bež. Kontrol. Svet. sa LEO LifePO4 - Litijum metalna fosfatna baterija, UN3480- UN 3480: Litijum jonska baterija	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV