

Tehničke karakteristike artikla: NLKEU003WL

Sigurn. svet. KE LED 3h 230V AC Wireless, univ. montaža




Tehnički podaci

Neto dužina (mm)	332,00
Neto širina (mm)	48,00
Neto visina (mm)	72,00
Neto težina (kg)	0,40
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	KE
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	HP-LED (3W)
Lumen	150
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	12/0,8 NiMh
IP stepen zaštite	IP40
Način montaže	Plafonska ugradna Univerzalna Plafonska nadgradna Montaža na zid
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)



NLKE...






NLKE... + NLKEE



NLKEE

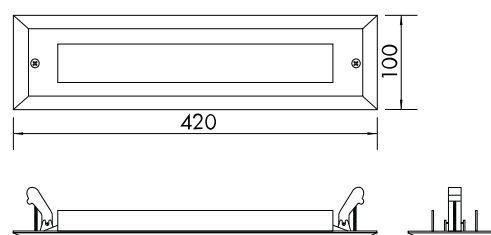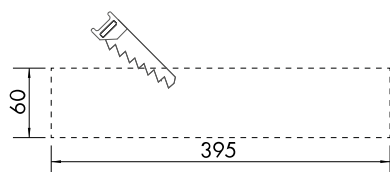

Drilling distances (mm)

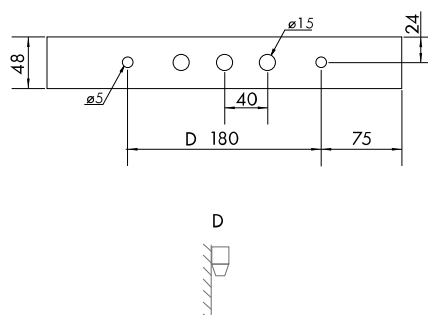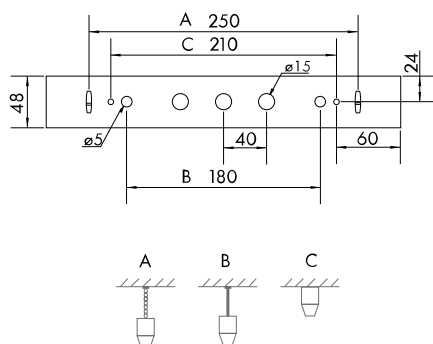

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,86	7,20	6,85	6,40	2,56
2,50	2,98	7,88	7,54	7,12	2,78
3,00	3,11	8,36	8,06	7,69	2,90
3,50	2,94	8,69	8,43	8,10	2,94
4,00	2,13	8,86	8,63	8,36	2,80

Tabela artikla

OPIS	Kat. broj
Sigurn. svet. KE LED 3h 230V AC Wireless, univ. montaža	NLKEU003WL
Dodatni pribor	
Napajanje 12V 0,8Ah za Bus kontrolu svetiljki, bežični	NLAKKU1208
Ugradni ram za serije KE/KX veliki otvor, test taster	NLKEE-EB
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4