

Tehničke karakteristike artikla: NLKMBS03WB

Emerg.lum.KMB 4x0,5W HighPowerLED 3h 230V AC WirelessConnect

Black, universal mounting, with LiFePO₄ battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm



Tehnički podaci



Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	50,00
Neto težina (kg)	0,29
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless veza
Verzija	Plastične svetiljke
Dizajn	KMB
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Vreme autonomije (h)	3
Izvor svetla	LED (2W)

Tehnički podaci - nastavak




Lumen	190
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	≥ IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKMB...

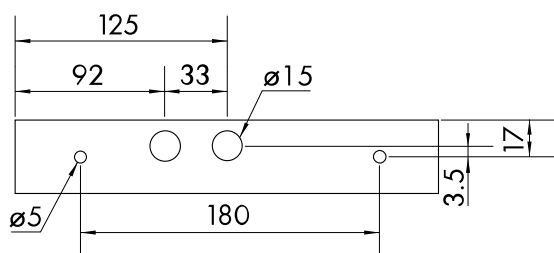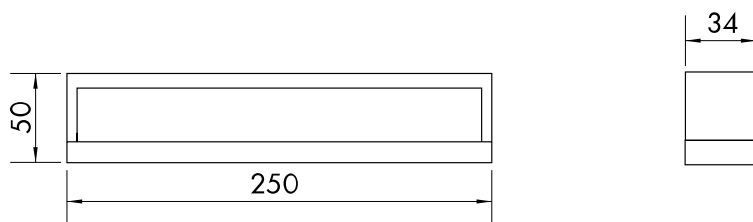

NLKME

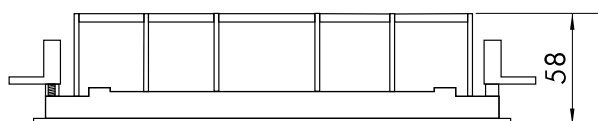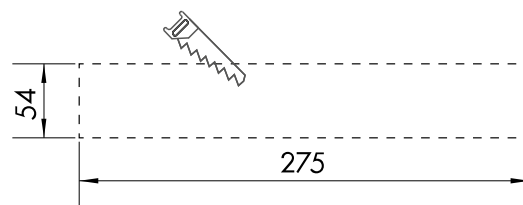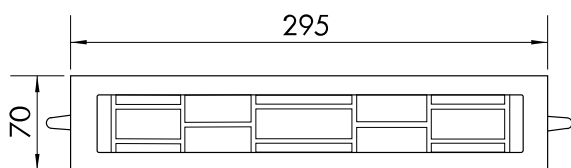

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Tabela artikla

OPIS	Kat. broj
Emerg.lum.KMB 4x0,5W HighPowerLED 3h 230V AC WirelessConnect Black, universal mounting, with LiFePO4 battery, emergency luminaire for illuminating escape routes, with Bluetooth communication.,NLKMBS03WB 190lm	
Dodatni pribor	
Ugradni okvir crni za CPS svetiljke dizajn KM,KMB,KS Required ceiling cut out: 275 x 54 mm	NLKMES
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4