

Tehničke karakteristike artikla: NLKMU403SC

Emergency luminaire KM Autotest LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm



Tehnički podaci

Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KM
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje prepoznavanja/domet (m)	24
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterije (V/Ah)	3,2/3,0 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKM...



NLKME



Bohrabstände (mm)

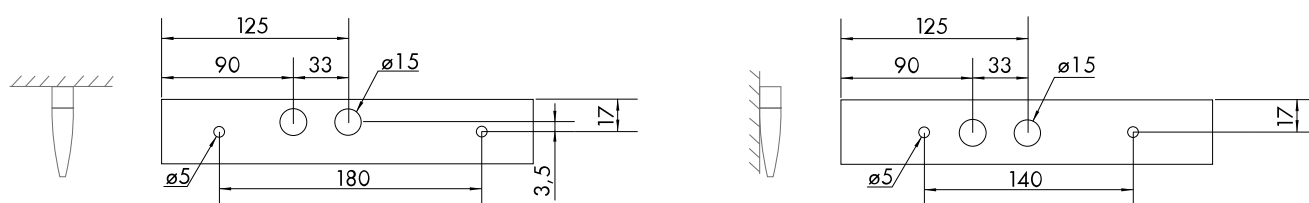


Tabela artikla

OPIS	Kat. broj
Emergency luminaire KM Autotest LED 3h 230V AC, white Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm	NLKMU403SC
Dodatni pribor	
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4
Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM l x h x d: 320 x 220 x 120mm	NLBALL1
Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Zidni nosač beli za svetiljke dizajna KM/KS	NLAWKSU