

Tehničke karakteristike artikla: NLKMUS03WB

Emerg.lum.KM 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Black, universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.



Tehnički podaci

Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless veza
Verzija	Plastične svetiljke
Dizajn	KM
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak


Područje prepoznavanja/domet (m)	24
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKM...



NLKME

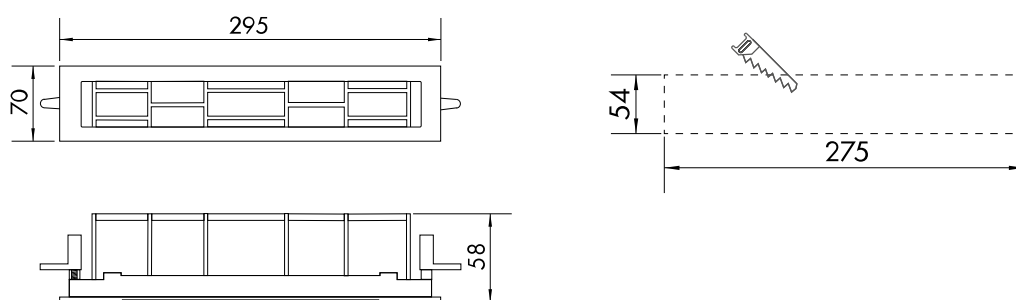

Bohrabstände (mm)



Tabela artikla

OPIS	Kat. broj
Emerg.lum.KM 4x0,5W HighPower LED 3h 230V AC WirelessConnect Black, universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLKMUS03WB
Dodatni pribor	
Ugradni okvir crni za CPS svetiljke dizajn KM,KMB,KS Required ceiling cut out: 275 x 54 mm	NLKMES
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4