

Tehničke karakteristike artikla: NLKMUS403B

Emergency luminaire KM WirelessConnect LED 3h 230V AC, black

Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.



Tehnički podaci


Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless veza
Verzija	Plastične svetiljke
Dizajn	KM
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	24

Tehnički podaci - nastavak


Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimenzija: Emergency luminaire KM WirelessConnect LED 3h 230V AC, black

NLKM...

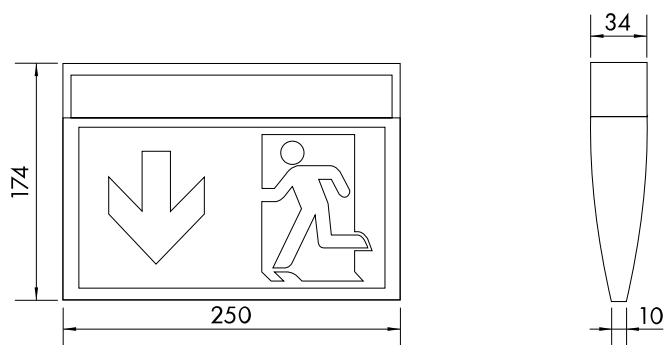

NLKME

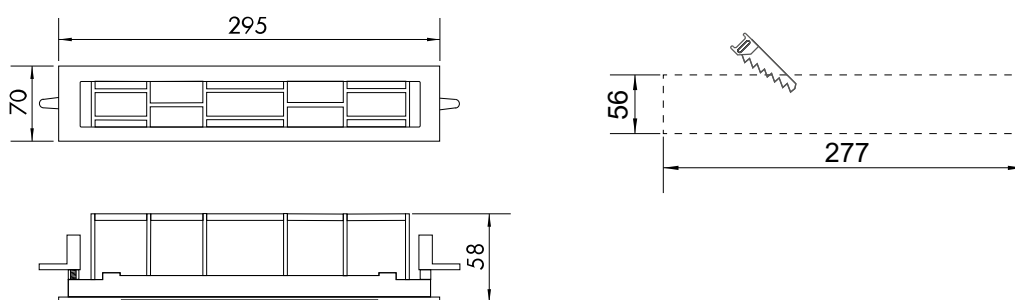

Dimenzija: Emergency luminaire KM WirelessConnect LED 3h 230V AC, black

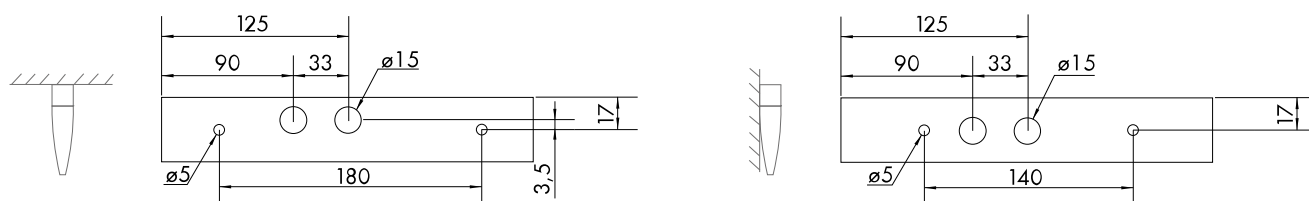


Tabela artikla

OPIS	Kat. broj
Emergency luminaire KM WirelessConnect LED 3h 230V AC, black Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLKMUS403B
Dodatni pribor	
Ugradni okvir crni za CPS svetiljke dizajn KM,KMB,KS Required ceiling cut out: 277 x 56 mm	NLKMES
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4