

Tehničke karakteristike artikla: NLKMUS509C

Emergency luminaire KM, 4x0,5W HP-LED, CC24, 24V, black

Universal mounting, with supervision - centrally switchable, viewing distance: 24m



Tehnički podaci

Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,25
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	24V Core24 sa nadzorom - centralno prebacivanje
Verzija	Plastične svetiljke
Dizajn	KM
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	24

Tehnički podaci - nastavak


Izvor svetla	LED (2W)
Lumen	200
Opseg napona (V)	24V AC
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP stepen zaštite	IP54
Otpornost na udar	IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

NLKM...



NLKME

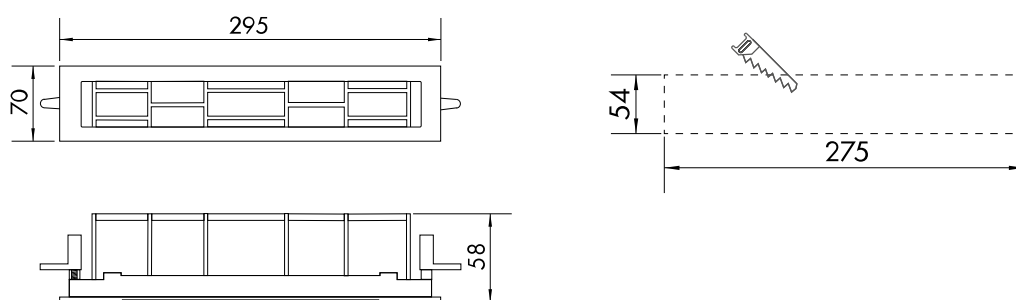

Bohrabstände (mm)



Tabela artikla

OPIS	Kat. broj
Emergency luminaire KM, 4x0,5W HP-LED, CC24, 24V, black Universal mounting, with supervision - centrally switchable, viewing distance: 24m	NLKMUS509C
Dodatni pribor	
Ugradni okvir crni za CPS svetiljke dizajn KM,KMB,KS Required ceiling cut out: 275 x 54 mm	NLKMES
Kutija za panik svetiljke tipa KMB,KS,KM, za montažu u beton	NLKMBE
Zidni nosač beli za svetiljke dizajna KM/KS	NLAWKSU
Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4