

Tehničke karakteristike artikla: NLKSC408WB

Emergency luminaire KS WirelessConnect LED 8h 230V AC, white

Universal mounting, with LiFePO₄ battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm



Tehnički podaci



Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless veza
Verzija	Plastične svetiljke
Dizajn	KS

Tehnički podaci - nastavak




Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	22
Vreme autonomije (h)	8
Izvor svetla	LED (2W)
Lumen	85
Opseg napona (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterije (V/Ah)	3,2/3,0 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	$\geq$ IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimenzija: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white



NLKS...

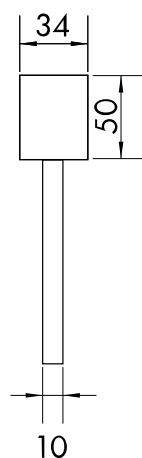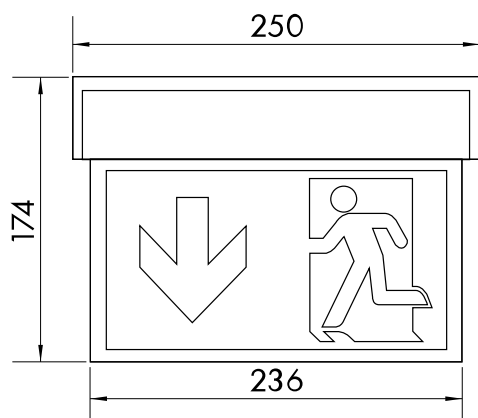

NLKME

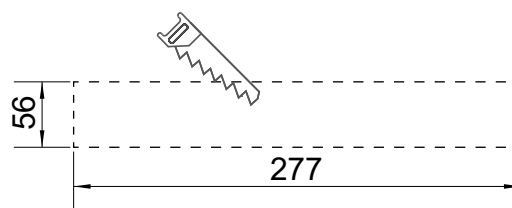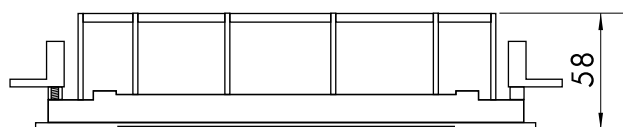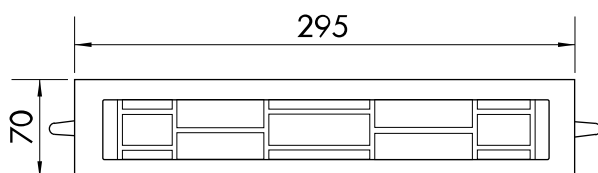

Dimenzija: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white

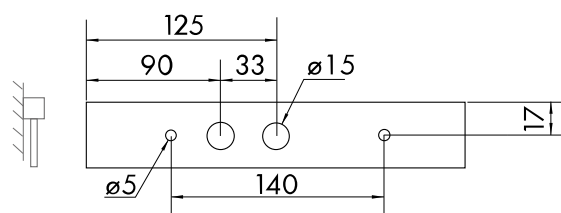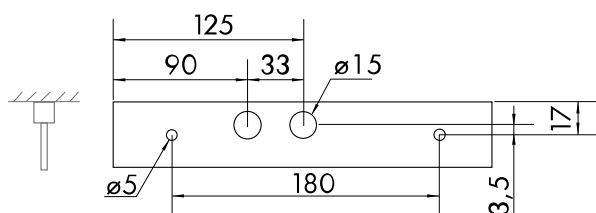

Lista fajlova: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tabela artikla

OPIS	Kat. broj
Emergency luminaire KS WirelessConnect LED 8h 230V AC, white Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm	NLKSC408WB
Dodatni pribor	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma „zaštita od požara“ 22m (2x4 kom.) Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač beli za svetiljke dizajna KM/KS	NLAWKSU
Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM	NLBALL1
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4