

Tehničke karakteristike artikla: NLKSCS403S

Emergency luminaire KS Autotest LED 3h 230V AC, black

Universal mounting, with 4x0,5W High Power LED, with LiFePO₄ battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm



Tehnički podaci

Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke Pljosnate svetiljke

Tehnički podaci - nastavak


Dizajn	KS
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9005 (crna)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	22
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterije (V/Ah)	3,2/3,0 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	≥ IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKS...



NLKME

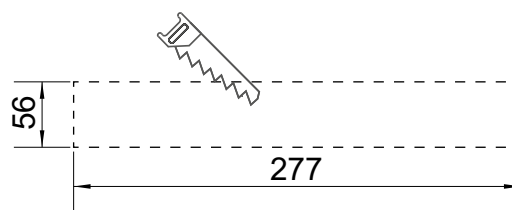

Bohrabstände (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tabela artikla

OPIS	Kat. broj
Emergency luminaire KS Autotest LED 3h 230V AC, black Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKSCS403S
Dodatni pribor	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Set piktograma „zaštita od požara“ 22m (2x4 kom.) Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE

Tabela artikla

OPIS	Kat. broj
Dodatni pribor	
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač beli za svetiljke dizajna KM/KS	NLAWKSU
Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM l x h x d: 320 x 220 x 120mm	NLBALL1
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovešanje 2000mm, 1 kom	NLCORD2
Sajla za ovešanje 4000mm, 1 kom	NLCORD4