

Tehničke karakteristike artikla: NLKSCS403W

# Emergency luminaire KS WirelessControl LED 3h 230V AC, black

Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm



## Tehnički podaci

|                                        |                                                                                                                     |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Neto dužina (mm)                       | 250,00                                                                                                              |
| Neto širina (mm)                       | 34,00                                                                                                               |
| Neto visina (mm)                       | 174,00                                                                                                              |
| Neto težina (kg)                       | 0,60                                                                                                                |
| Vrsta svetiljke (prema načinu primene) | Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta<br>anti-panik svetiljka<br>sigurnosna rasveta |
| VB-CPS                                 | Sa sopstvenom baterijom                                                                                             |
| Funkcija                               | Wireless kontrola Professional                                                                                      |
| Verzija                                | Plastične svetiljke<br>Pljosnate svetiljke                                                                          |
| Dizajn                                 | KS                                                                                                                  |

## Tehnički podaci - nastavak


|                                  |                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Bezhalogeni                      | Bez halogeno plastično kućište                                                                                                  |
| Opis boje                        | RAL 9005 (crna)                                                                                                                 |
| Piktogram                        | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje prepoznavanja/domet (m) | 22                                                                                                                              |
| Vreme autonomije (h)             | 3                                                                                                                               |
| Izvor svetla                     | LED (2W)                                                                                                                        |
| Lumen                            | 190                                                                                                                             |
| Opseg napona (V)                 | 230V AC 50Hz ±20%                                                                                                               |
| Power maintained mode (W)        | 3,90                                                                                                                            |
| Power non-maintained mode (W)    | 1,50                                                                                                                            |
| Power max. (W)                   | 5,30                                                                                                                            |
| Baterije (V/Ah)                  | 3,2/3,0 LiFePO4                                                                                                                 |
| IP stepen zaštite                | IP54                                                                                                                            |
| Otpornost na udar                | ≥ IK03                                                                                                                          |
| Način montaže                    | Stropna ugradna opcija<br>Univerzalna<br>Plafonska nadgradna<br>Montaža na zid                                                  |
| Min. temperatura okoline (°C)    | -5                                                                                                                              |
| Maks. temperatura okoline (°C)   | 40                                                                                                                              |
| AA Klasa E 8101                  | AA4                                                                                                                             |
| Proizvođač                       | Schrack                                                                                                                         |

## Abmessungen (mm)



NLKS...



NLKME

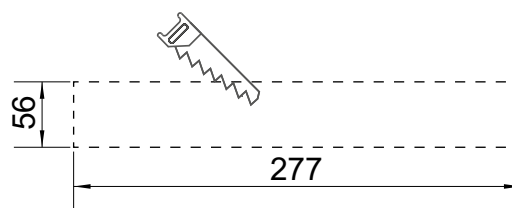

## Bohrabstände (mm)

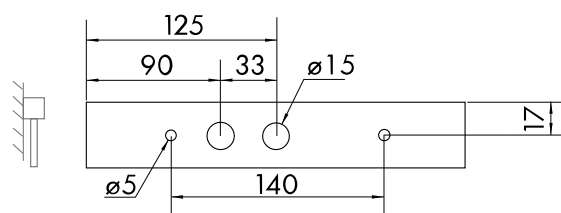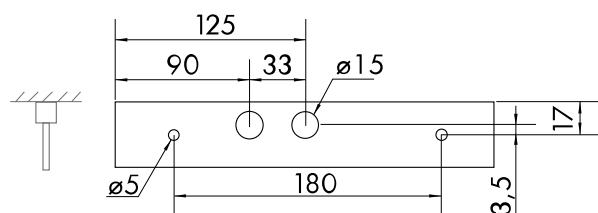

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

|                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| 2,00                                                                              | 3,01                                                                              | 7,45                                                                              | 7,31                                                                              | 6,8                                                                                 | 2,73                                                                                |
| 2,50                                                                              | 1,71                                                                              | 8,22                                                                              | 7,95                                                                              | 7,38                                                                                | 3,09                                                                                |
| 3,00                                                                              | 1,24                                                                              | 7,01                                                                              | 6,74                                                                              | 8,07                                                                                | 3,15                                                                                |
| 3,50                                                                              | 1,21                                                                              | 6,33                                                                              | 6,34                                                                              | 8,72                                                                                | 2,89                                                                                |
| 4,00                                                                              | 1,24                                                                              | 3,56                                                                              | 6,18                                                                              | 8,9                                                                                 | 2,82                                                                                |
| 5,00                                                                              | 1,08                                                                              | 3,45                                                                              | 5,58                                                                              | 8,17                                                                                | 2,02                                                                                |

### Tabela artikla

| OPIS                                                                                                                                                                                                                                                    | Kat. broj  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire KS WirelessControl LED 3h 230V AC, black<br>Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm                      | NLKSCS403W |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                   |            |
| Accu LiFePO4 3,2V 3,3Ah for LED luminaire<br>For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah                                            | NLAKKU3233 |
| Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                                   | NLAMPIKTLO |
| Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                                   | NLAMPIKTLU |
| Plug-pictogram desno gore za dizajn AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                                            | NLAMPIKTRO |
| Plug-pictogram desno dole za dizajn AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                                            | NLAMPIKTRO |
| Set piktograma „zaštita od požara“ 22m (2x4 kom.)<br>Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB. | NLKS4FIRE  |
| Pictograph set "first aid" vd: 22m (2x4 pcs.)<br>pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB                           | NLKS4HELP  |
| Zidni nosač beli za svetiljke dizajna KM/KS                                                                                                                                                                                                             | NLAWKSU    |
| Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena<br>Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery                                                                                                            | NL2DWKMKS  |
| Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM<br>l x h x d: 320 x 220 x 120mm                                                                                                                                                                   | NLBALL1    |
| Cevni nosač hromirani, 2m, montaža na plafon                                                                                                                                                                                                            | NLDSA000   |
| Sajla za ovešanje 2000mm, 1 kom                                                                                                                                                                                                                         | NLCORD2    |

## Tabela artikla

| OPIS                            | Kat. broj |
|---------------------------------|-----------|
| <b>Dodatni pribor</b>           |           |
| Sajla za ovešanje 4000mm, 1 kom | NLCORD4   |