

Tehničke karakteristike artikla: NLKSCT403W

Emergency luminaire KS WirelessControl LED 3h 230V AC TT

White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, LiFePO₄ battery suitable for low temperatures -25° to 40°C



Tehnički podaci



Neto dužina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto težina (kg)	0,60
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola niske temperature
Verzija	Plastične svetiljke Pljosnate svjetiljke

Tehnički podaci - nastavak




Dizajn	KS
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	22
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Lumen	190
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterije (V/Ah)	3,2/3,0 LiFePO4
IP stepen zaštite	IP54
Otpornost na udar	≥ IK03
Način montaže	Stropna ugradna opcija Univerzalna Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4
Proizvođač	Schrack

Abmessungen (mm)



NLKS...

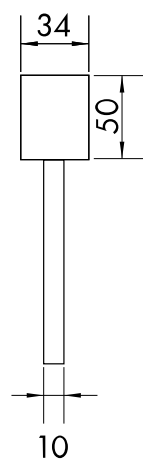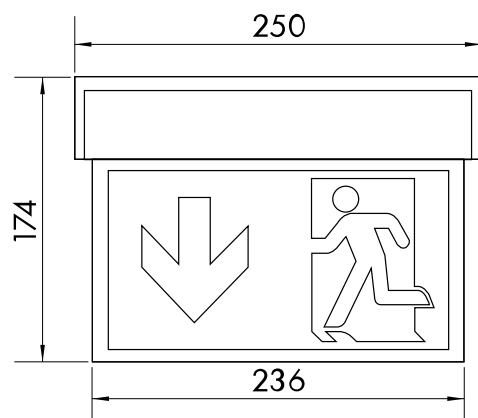

NLKME

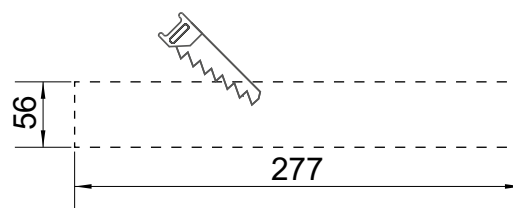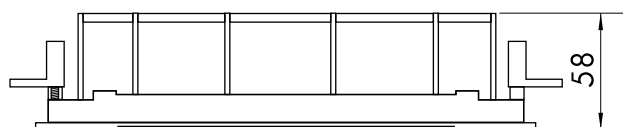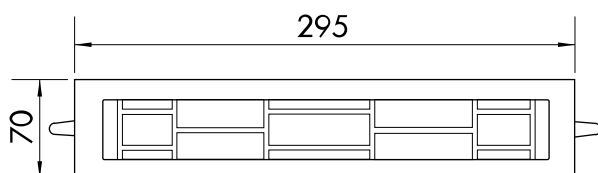

Bohrabstände (mm)

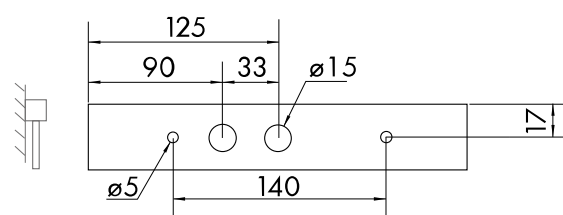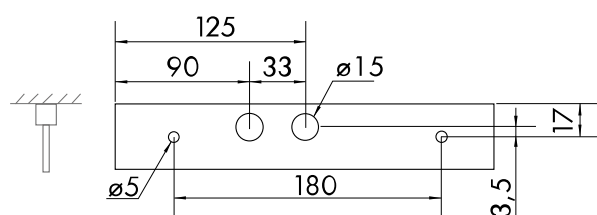

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Tabela artikla

OPIS	Kat. broj
Emergency luminaire KS WirelessControl LED 3h 230V AC TT White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKSCT403W
Dodatni pribor	
Accu LiFePO4 3.2V 3.3Ah za LED svetiljku LiFePO4 - Litijum-gvožđe fosfat baterija za niske temperature, UN3480 - UN 3480 : Litijum-jonske baterije, -25° do 40°C	NLAKKU323T
Plug-pictogram levo gore za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram levo dole za svetiljke dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram desno gore za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram desno dole za dizajn AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma „zaštita od požara“ 22m (2x4 kom.) Set piktograma prema standardu ISO 7010 obuhvata: aparat za gašenje požara, vatrogasno crevo, ručni javljač požara i zbirnu oznaku vatrogasne opreme. Kompatibilno sa dizajn serijama KS, AM i KB.	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač beli za svetiljke dizajna KM/KS	NLAWKSU
Visilica dizajnirana za KS, KM panike, 500mm bela, ožičena Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna rešetka za serije KD, KM, KS, LM, VM, RI, RM l x h x d: 320 x 220 x 120mm	NLBALL1
Cevni nosač hromirani, 2m, montaža na plafon	NLDSA000
Sajla za ovesanje 2000mm, 1 kom	NLCORD2
Sajla za ovesanje 4000mm, 1 kom	NLCORD4