


Tehničke karakteristike artikla: NLKWD003WL

Sigurn. svet. KW LED 3h 230V AC Wireless kontrola, plafon

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m, WirelessControl Professional type

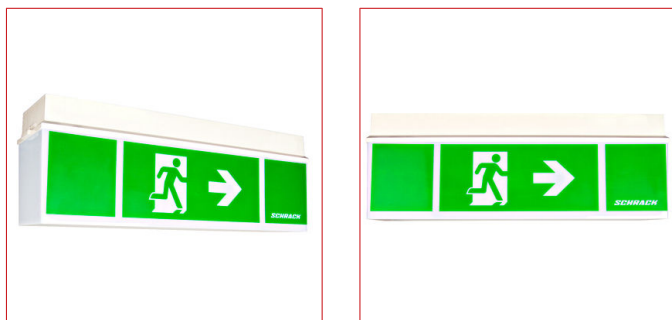

Tehnički podaci

Neto dužina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	125,00
Neto težina (kg)	0,90
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	KW
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Piktogram	Set samoljepljivih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010
Područje prepoznavanja/domet (m)	16
Vreme autonomije (h)	3
Izvor svetla	LED (3W)
Lumen	150
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	12/0,8 NiMh
IP stepen zaštite	IP54
Način montaže	Plafonska nadgradna

Tehnički podaci - nastavak

AA Klasa E 8101


AA4

Proizvođač

Schrack

Dimensions (mm)

NLKWD...

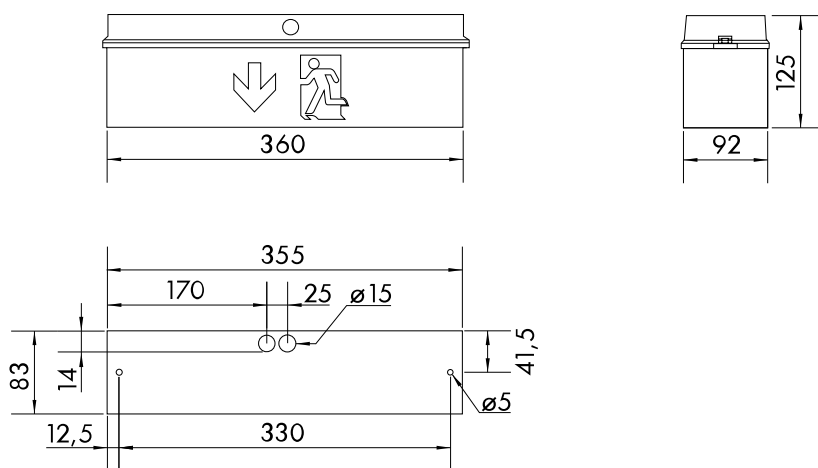

Abstandstabelle - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Tabela artikla

OPIS	Kat. broj
Sigurn. svet. KW LED 3h 230V AC Wireless kontrola, plafon suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m, WirelessControl Professional type	NLKWD003WL
Dodatni pribor	
Poklopac od providnog stakla za KW	NLKCW
Zaštitna rešetka za seriju KW	NLBKW
Set piktograma za NLKWI... strelice levo, desno, gore, dole	NLKWIPIKTO
Visoki poklopac za zidnu montažu za KW lampu, opal	NLKWH
Napajanje 12V 0,8Ah za Bus kontrolu svetiljki, bežični	NLAKKU1208
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLWX001