


Tehničke karakteristike artikla: NLKWD031SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm

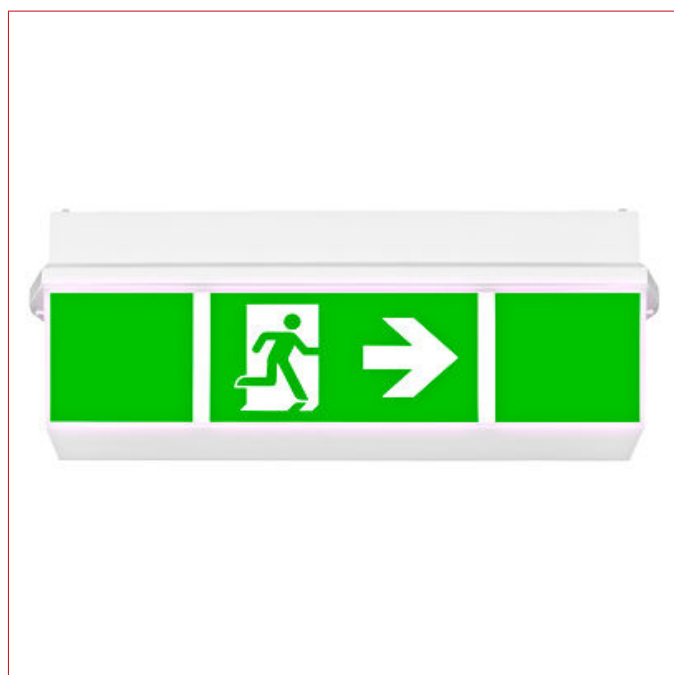


Tehnički podaci

Neto dužina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto težina (kg)	0,70
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KW

Tehnički podaci - nastavak

Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Područje prepoznavanja/domet (m)	16
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (4W)
Lumen	1h: 520;3h: 520
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	9,6/2,0 NiMh
IP stepen zaštite	IP65
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

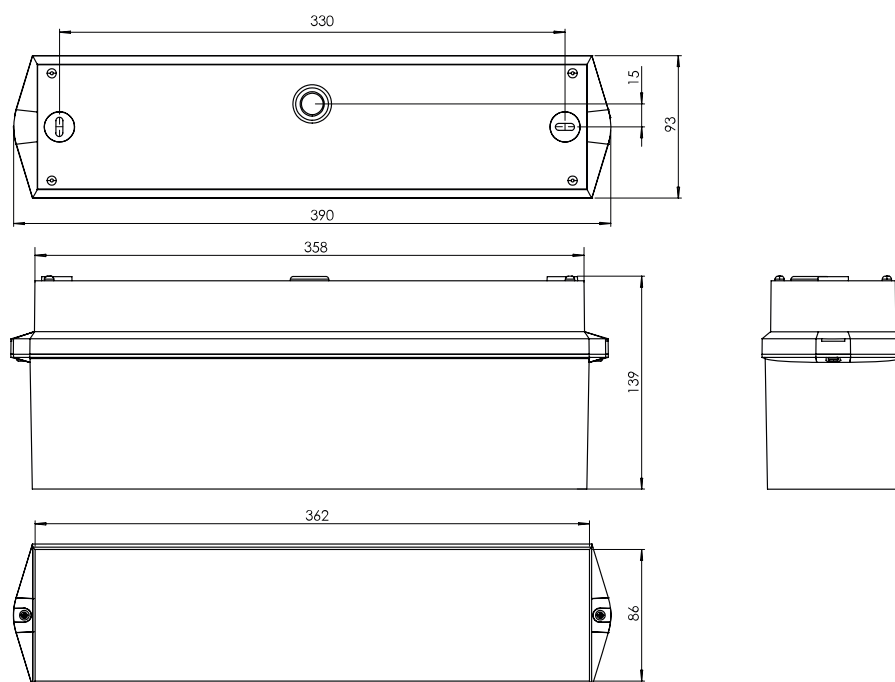

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Tabela artikla

OPIS	Kat. broj
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD031 SC side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm	
Dodatni pribor	
Zaštitna rešetka za seriju KW	NLBKW
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001