

Tehničke karakteristike artikla: NLKWD033SC

Panik sv. KW 4x1W ERT-LED 1h, 3h, 8h 230VAC samostalna plaf.

1h/3h/8h podesiva



Tehnički podaci

Neto dužina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	125,00
Neto težina (kg)	0,70
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KW
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Područje prepoznavanja/domet (m)	16
Vreme autonomije (h)	3
Izvor svetla	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	9,6/2,0 NiMh
IP stepen zaštite	IP54
Način montaže	Plafonska nadgradna

Tehnički podaci - nastavak

AA Klasa E 8101


AA4

Proizvođač

Schrack

Dimensions (mm)

NLKWD...

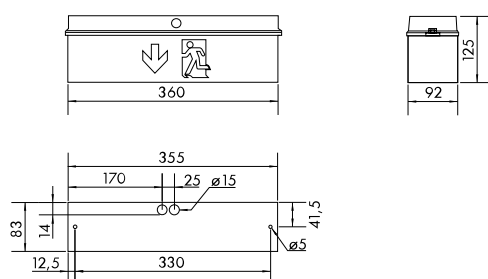

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	3,46	9,46	7,98	6,13	2,30
2,50	3,57	9,93	8,36	6,47	2,33
3,00	3,58	10,22	8,57	6,65	2,26
3,50	3,38	10,35	8,62	6,67	2,02
4,00	3,13	10,32	8,51	6,53	1,62

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	2,14	6,39	5,34	4,14	1,35
2,50	1,95	6,40	5,27	4,04	0,96
3,00	0,00	6,16	4,72	3,68	0,00
3,50	0,00	3,90	2,39	2,40	0,00
4,00	0,00	2,41	0,81	0,82	0,00

Tabela artikla

OPIS	Kat. broj
Panik sv. KW 4x1W ERT-LED 1h,3h,8h 230VAC samostalna plaf. 1h/3h/8h podesiva	NLKWD033SC
Dodatni pribor	
Poklopac od providnog stakla za KW	NLKWC
Zaštitna rešetka za seriju KW	NLBKW
Set piktograma za NLKWI.. strelice levo, desno, gore, dole	NLKWIPIKTO
Visoki poklopac za zidnu montažu za KW lampu, opal	NLKWH
Baterija 9,6V 2,0Ah sa ERT-LED, 1h,3h,8h Suitable for LPU module	NLAKKU9620
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001