

Tehničke karakteristike artikla: NLKWD818--

Sigurnosna svetiljka KW FLUO 8W, EVG, CPS sistem, plafonska

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m




Tehnički podaci

Vrsta izvora	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	Standard
Verzija	Plastične svetiljke
Dizajn	KW
Boja	belo
Područje prepoznavanja/domet (m)	16
Izvor svetla	T5 (8W)
Lumen	450
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%

Tehnički podaci - nastavak

IP stepen zaštite	IP54
Montaža	Plafonsko nadgradna
Neto težina (kg)	0,70

Dimensions (mm)

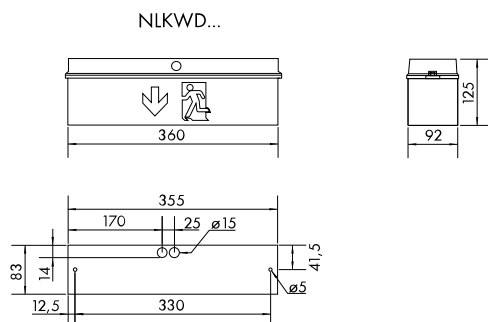

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,42	7,97	6,17	2,30
2,50	3,57	9,89	8,35	6,51	2,33
3,00	3,58	10,18	8,56	6,68	2,26
3,50	3,38	10,30	8,61	6,70	2,02
4,00	3,13	10,27	8,50	6,57	1,62

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetiljka KW FLUO 8W, EVG, CPS sistem, plafonska suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD818
Dodatni pribor	
Poklopac od providnog stakla za KW	NLKWC
Zaštitna rešetka za seriju KW	NLBKW
Set piktograma serije KW-levo, desno, napred	NLKW0103
Visoki poklopac za zidnu montažu za KW lampu, opal	NLKWH
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001