

Tehničke karakteristike artikla: NLKWD833SC

Sigurnosna svetiljka KW 3h 230V sa samokontrolom, 8W

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m




Tehnički podaci

Vrsta izvora	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KW
Bezhalogeni	Housing made of halogen-free plastic
Boja	belo
Područje prepoznavanja/domet (m)	16
Vreme autonomije (h)	3
Izvor svetla	T5 (8W)

Tehnički podaci - nastavak

Lumen	180
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	4,8/2,4 NiMh
IP stepen zaštite	IP54
Montaža	Plafonsko nadgradna
AA Class E 8101	AA5
Neto težina (kg)	0,70

Dimensions (mm)

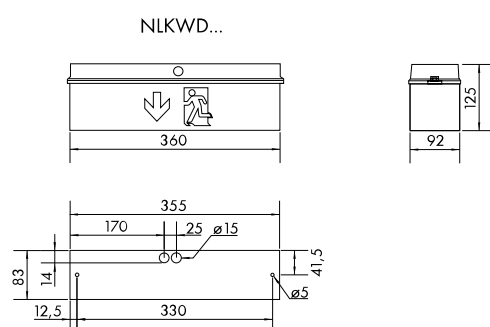

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,75	7,60	6,41	5,00	1,74
2,50	2,68	7,82	6,56	5,11	1,62
3,00	2,43	7,83	6,49	5,02	1,27
3,50	1,86	7,64	6,21	4,72	0,43
4,00	0,00	5,81	3,78	3,92	0,00

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetiljka KW 3h 230V sa samokontrolom, 8W suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD833SC
Dodatni pribor	
Poklopac od providnog stakla za KW	NLKWC
Zaštitna rešetka za seriju KW	NLBKW
Set piktograma serije KW-levo, desno, napred	NLKW0103
Visoki poklopac za zidnu montažu za KW lampu, opal	NLKWH
Baterija 4,8V 2,4Ah za svet. sa sop. napaj. 8W, 3h NLxxx833	NLAKKU4824
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001