


Tehničke karakteristike artikla: NLKWW009--

Panik I. KW LED 230VAC , montaža zid


suitable for wall mounting with pictogram on one side, viewing distance: 16m

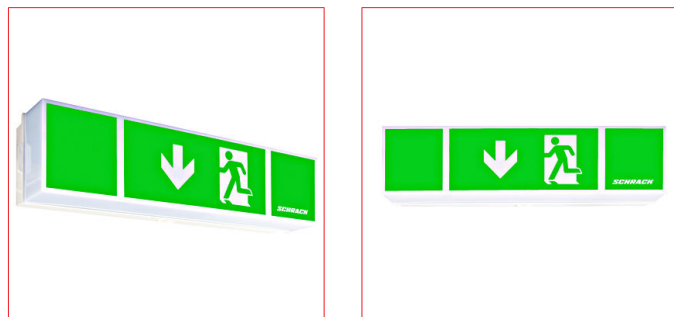

Tehnički podaci

Neto dužina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	85,00
Neto težina (kg)	0,70
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	Standard
Verzija	Plastične svetiljke
Dizajn	KW
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Područje prepoznavanja/domet (m)	16
Izvor svetla	HP-LED (3W)
Lumen	300
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stepen zaštite	IP54
Način montaže	Montaža na zid
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

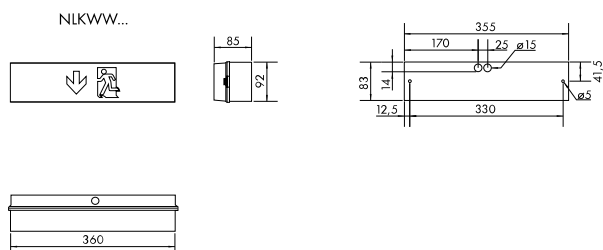

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Tabela artikla

OPIS	Kat. broj
Panik I. KW LED 230VAC , montaža zid suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW009
Dodatni pribor	
Poklopac od providnog stakla za KW	NLKWC
Zaštitna rešetka za seriju KW	NLBKW
Set piktograma serije KW-levo, desno, napred	NLKW0103
Niski poklopac za plafonsku montažu za KW lampu, opal	NLKWN