


Tehničke karakteristike artikla: NLKWW401SC

Emergency luminaire KW Autotest LED 3h 230V AC wall mount

1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm




Tehnički podaci

Neto dužina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	99,00
Neto težina (kg)	1,30
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	Plastične svetiljke
Dizajn	KW
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	bela
Područje prepoznavanja/domet (m)	16
Vreme autonomije (h)	3

Tehnički podaci - nastavak

Izvor svetla	LED (3W)
Lumen	1h: 300;3h: 300
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP stepen zaštite	IP54
Način montaže	Plafonska nadgradna Montaža na zid
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimenzija: Emergency luminaire KW Autotest LED 3h 230V AC wall mount

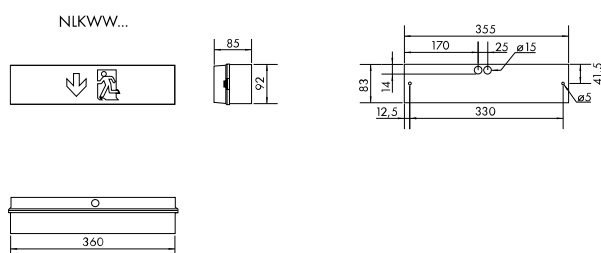

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,31	8,48	7,84	7,17	2,84
2,50	3,46	9,07	8,42	7,75	2,99
3,00	3,52	9,49	8,84	8,17	3,06
3,50	3,51	9,78	9,12	8,46	3,05
4,00	3,41	9,94	9,28	8,62	2,95
5,00	2,90	9,90	9,26	8,60	2,46
6,00	1,60	9,40	8,76	8,14	1,24

Tabela artikla

OPIS	Kat. broj
Emergency luminaire KW Autotest LED 3h 230V AC wall mount 1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	NLKWW401SC
Dodatni pribor	
Zaštitna rešetka za seriju KW	NLBKW
Par cevnih nosača 500mm beli, montaža plafon, ožičeni	NL2PW
Zidni nosač beli pogodan za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001