

Tehničke karakteristike artikla: NLMI106A09

Low Power Supply MicroControl 6 circ. total max. 120 lumin.

6 electrical circuits, max. 120 luminaires (20 luminaires per circuit), max. power rating: 900 W
1 h / 400 W 3 h / 160 W 8 h, including 9Ah OGiV battery set, h x w x d: 630 x 350 x 720
mm



Tehnički podaci

Neto dužina (mm)	230,00
Neto širina (mm)	350,00
Neto visina (mm)	630,00
Neto težina (kg)	64,70

Abmessungen (mm)

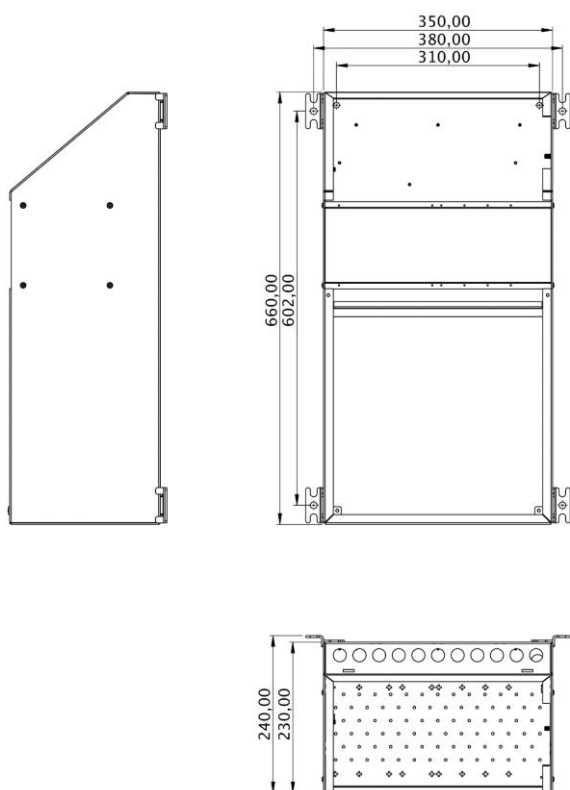


Tabela artikla

OPIS	Kat. broj
Low Power Supply MicroControl 6 circ. total max. 120 lumin. 6 electrical circuits, max. 120 luminaires (20 luminaires per circuit), max. power rating: 900 W 1h / 400 W 3 h / 160 W 8 h, including 9Ah OGiV battery set, h x w x d: 630 x 350 x 720 mm	NLMI106A09
Dodatni pribor	
E30 zaštita za LPS MicroControl, CC sa ventilatorom dimenzije 918 x 711 x 345mm (HxWxD), RAL7035, protection class II, IP54, 70kg, za LPS MicroControl (7Ah i 9Ah) i za LPS CoreCompact 24 (40Ah)	NLMIE30A
Pleksiglas vrata sa ključem za centralu CPS tip Microcontrol	NLPLXMIC
Trofazni nadzor napona sa Bus kontrolom za Multicontrol	NLMCLM
Trofazni nadzor mrežnog napona PC230 Nadzor napona u razvodima osvetljenja	NLPC2300
Modul za upravljanje osvetljenjem, 8 ulaza, separadni	NLSAM24
Nadzorna ploča sa LCD zaslonom, BUS komunikacija	NLMCT15
Nadzorna ploča sa LCD zaslonom, sa ključem, BUS komunikacija With key switch	NLMCT15S