

Tehničke karakteristike artikla: NLMMDTA09E

MM Duo panika LED, antracit, plafonska

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto dužina (mm)	236,00
Neto širina (mm)	45,00
Neto visina (mm)	136,00
Neto težina (kg)	1,15
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	MM
Opis boje	RAL 7016 (antracit)
Piktogram	Set umetnih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010
Područje prepoznavanja/domet (m)	22

Tehnički podaci - nastavak

Izvor svetla	LED (2W) ERT-LED (1W)
Lumen	140
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	1,10
Power max. (W)	5,10
IP stepen zaštite	IP40
Otpornost na udar	≥ IK03
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

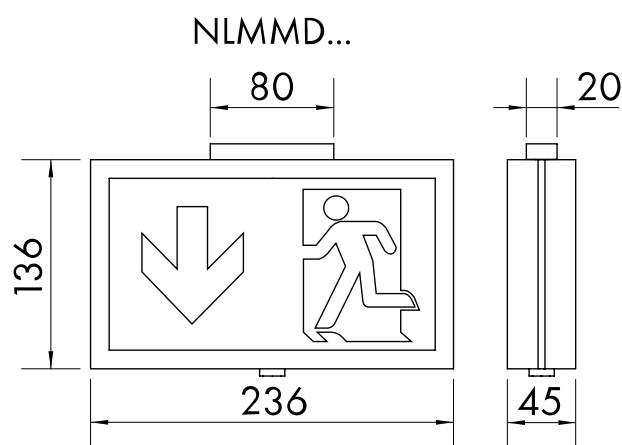

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,86	8,79	6,13	3,19	1,41
2,50	2,85	9,62	6,47	3,7	1,56
3,00	3,12	9,84	5,76	4,11	1,61
3,50	3,32	10,35	6,26	4,41	1,48
4,00	3,46	8,75	6,65	4,55	1,22

OPIS	Kat. broj
MM Duo panika LED, antracit, plafonska	
Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLMMDTA09E